

Burntwood Cycle Shelter BXMW/BURNT



Standard Unit Dimensions

Width: 4100mm

Height: 2200mm

Length with Capacities

4100mm 10 cycles

Features

Robust modular construction

Load bearing purlins

Welded end frames


Made from heavy-duty mild steel box section

Assembled with anti-tamper high strength bolts

Anti-climb end frames

Hot dip galvanized to BS EN ISO 1461:2009

Weather resistant cladding

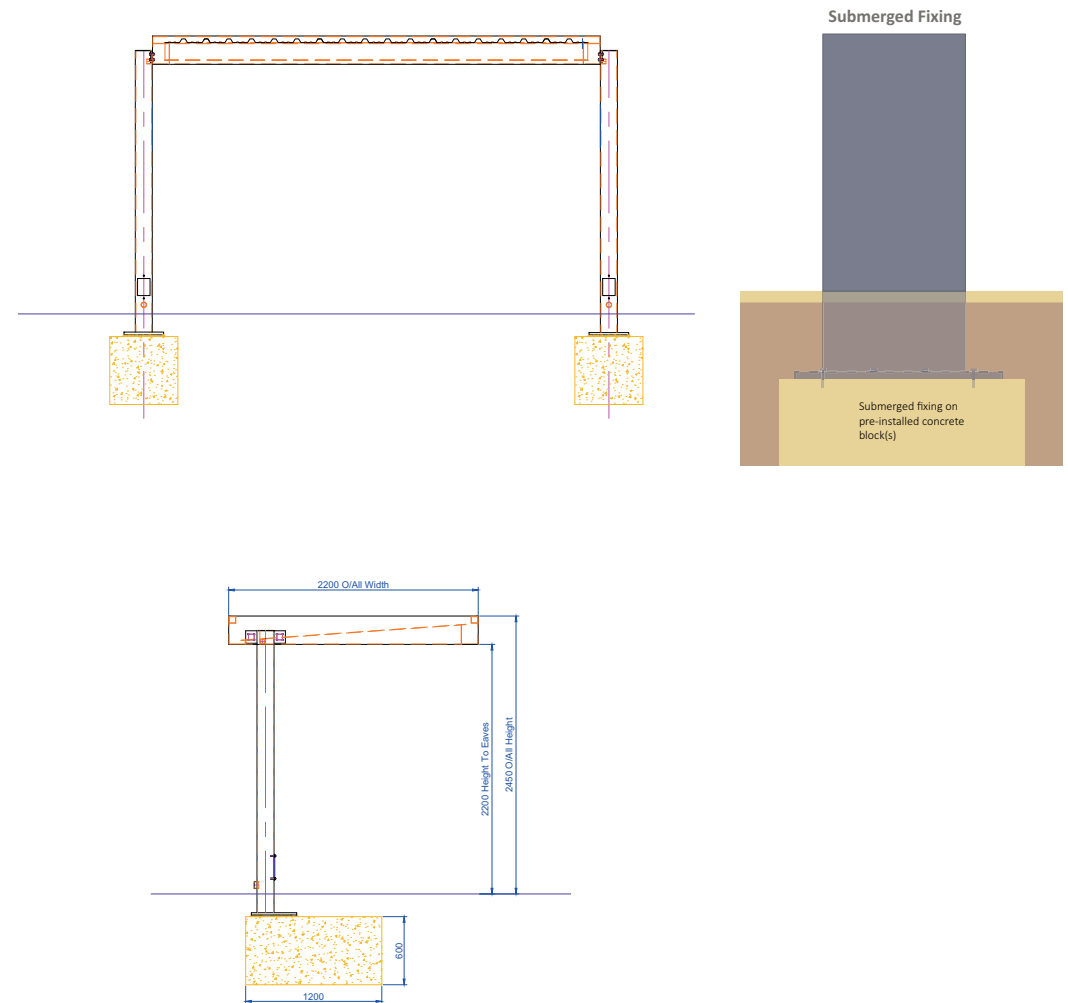

Burntwood Cycle Shelter BXMW/BURNT

Materials Used

Framework - Mild Steel
Cladding - Steel Profile, Trapezoidal roof cladding
Fasteners - Zinc Plated
Cover Strips - Pre-galvanized steel flat

Finish Options (Framework)

Hot-Dip Galvanized to BS EN ISO 1461:2009
Hot-Dip Galvanized & Polyester Powder Coated 60mm-120mm dft
Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance


Cladding is fire tested to '1Y' for BS 476

Design-Life, Guarantees & Warranties (terms apply)

25 year structural guarantee
34 year (min) life expectancy for Hot Dip Galvanizing
8-10 year life expectancy on standard powder coatings
10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
10 years manufacturers guarantee on cladding material
10 year warranty on product materials
12 year warranty on parts & labour

Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information)

Installation

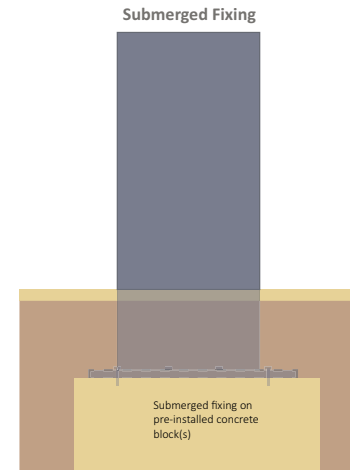

Options

Opal Cladding to Roof
Powder Coating to a wide range of colours
LED or solar lighting
Full Installation Service
Varied Range of Cycle Racks
Varied Range of Cycle Stands

Colours/Finishes



THE COLOURS SHOWN ARE A GUIDE ONLY.
PLEASE CHECK A COLOUR CHART TO SEE THE
ACTUAL COLOUR.