

Cambridge Cycle Shelter BXMW/CAM2



Standard Unit Dimensions

Width: 2994mm

Height: 2520mm (overall)


Length with Capacities

5000mm

12 cycles

Features

- Robust modular construction
- Load bearing purlins
- Welded end frames
- Made from heavy-duty mild steel box section purlins and circular uprights
- Assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Hot dip galvanized to BS EN ISO 1461:2009
- Weather resistant cladding

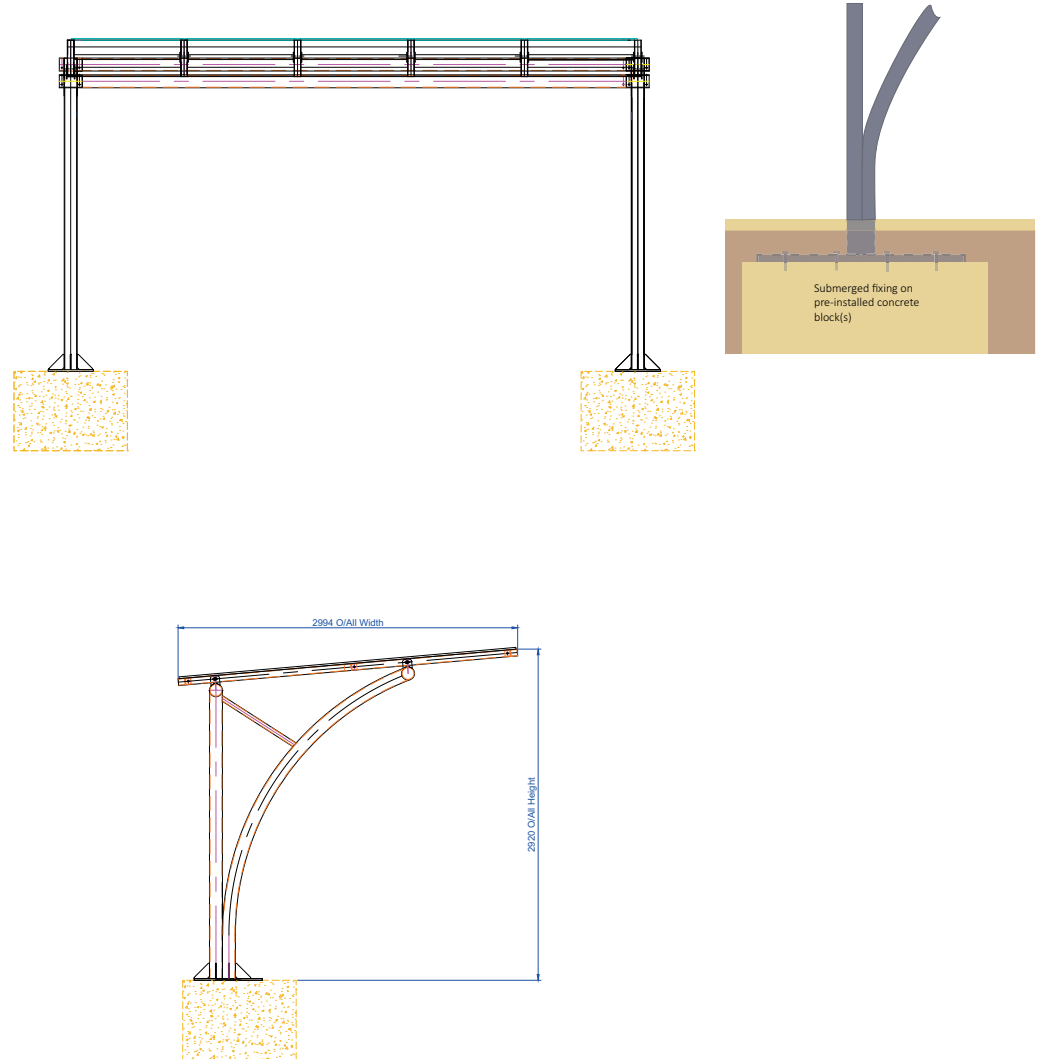

Cambridge Cycle Shelter BXMW/CAM2

Materials Used

Framework - Mild Steel

Cladding - 6mm Structured Multiwall Polycarbonate

Fasteners - Zinc Plated

Cover Strips - Pre-galvanized steel flat

Finish Options (Framework)

Hot-Dip Galvanized to BS EN ISO 1461:2009

Hot-Dip Galvanized & Polyester Powder Coated 60mm-120mm dft

Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance

Cladding is UV Stabilised

Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Design-Life, Guarantees & Warranties (terms apply)

25 year structural guarantee

34 year (min) life expectancy for Hot Dip Galvanizing

8-10 year life expectancy on standard powder coatings


10-15 year life expectancy on Duplex (Zinc Coated) powder coatings

10 years manufacturers guarantee on cladding material

10 year warranty on product materials

12 year warranty on parts & labour

Installation

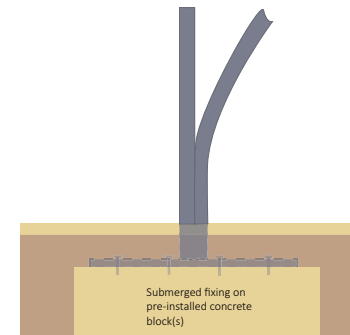

Options

Steel Profile, Trapezoidal roof cladding

Opal Cladding to Roof

Powder Coating to a wide range of colours

LED or solar lighting

Full Installation Service

Varied Range of Cycle Racks

Varied Range of Cycle Stands

Colours/Finishes



THE COLOURS SHOWN ARE A GUIDE ONLY.
PLEASE CHECK A COLOUR CHART TO SEE THE
ACTUAL COLOUR.

Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information)