Bollards Specification Sheet

Hexham PU Bollard BXPU 1520-RT






Standard Unit Dimensions:

Diameter: 195mm Height: 897mm Root Length: 300mm Weight: 22kg

Colours/Finishes:





Product Information

Robust duracastTM polyurethane (PU) bollard with fluted trunk and pillar box top.

Features

- Duracast™ Polyurethane (PU) bollard
- Available with diffrent coloured reflective bands
- Rounded Top
- Available in a range of colours

Materials Used

Duracast™ Polyurethane

Options

- Root, base plate or removable fixing
- 'Anti-ram' version
- Available in cast iron
- Decorative highlighting (gold as standard, other colours available on request) Reflective banding

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com







instructionline CH/



CE




All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (NS,EW) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

C

Hexham PU Bollard **BXPU 1520-RT**



Diagram

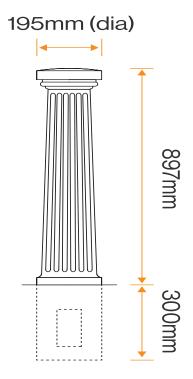


Standard Unit Dimensions:

Diameter: 195mm Height: 897mm Root Length: 300mm Weight: 22kg

Colours/Finishes:






Installation

Standard Root





Removable Socket



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Station Support Sup



Constructionline CHAS





CE EN 1091-4