

Coventry Gullwing Cycle Shelter BXMW/COV/GU



Standard Unit Dimensions


Width: 4885mm
Height: 2200mm

Length with Capacities

3600mm	8 cycles
4100mm	20 cycles
5000mm	24 cycles

Features

- Robust modular construction
- Load bearing purlins
- Welded end frames
- Made from heavy-duty mild steel box section
- Assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Hot dip galvanized to BS EN ISO 1461:2009
- Weather resistant cladding

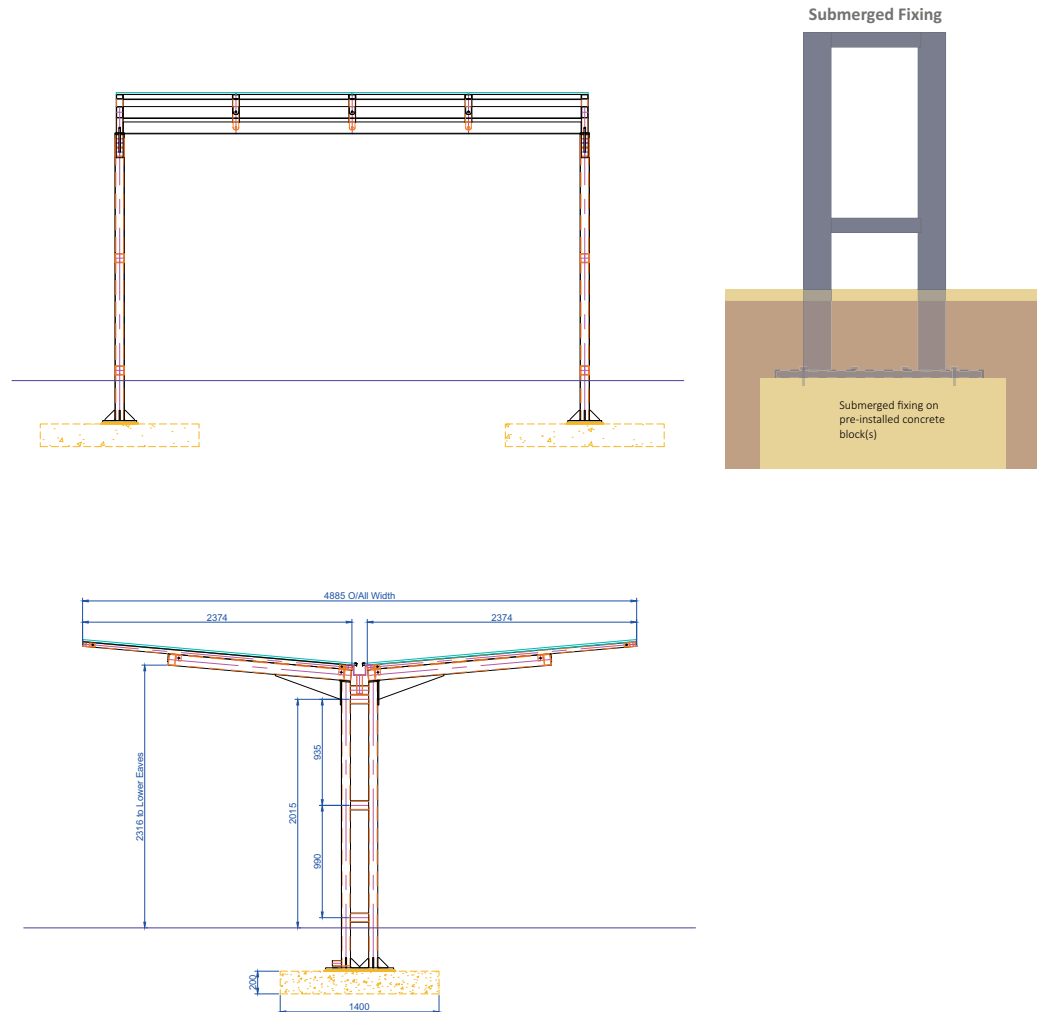

Coventry Gullwing Cycle Shelter BXMW/COV/GU

Installation

Materials Used

Framework - Mild Steel

Cladding - 16 mm Structured Multiwall Polycarbonate

Fasteners - Zinc Plated

Cover Strips - Pre-galvanized steel flat

Finish Options (Framework)

Hot-Dip Galvanized to BS EN ISO 1461:2009

Hot-Dip Galvanized & Polyester Powder Coated 60mm-120mm dft

Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Weather Resistance

Cladding is UV Stabilised

Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Design-Life, Guarantees & Warranties (terms apply)

25 year structural guarantee

34 year (min) life expectancy for Hot Dip Galvanizing


8-10 year life expectancy on standard powder coatings

10-15 year life expectancy on Duplex (Zinc Coated) powder coatings

10 years manufacturers guarantee on cladding material

10 year warranty on product materials

12 year warranty on parts & labour

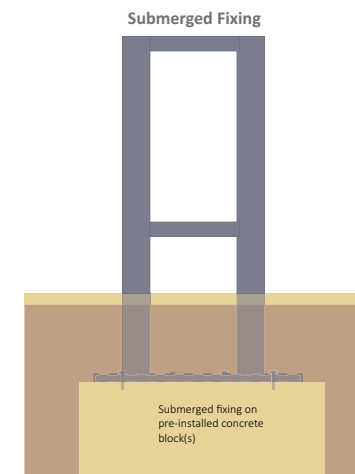

Options

Steel Profile, Trapezoidal roof cladding

Opal Cladding to Roof and Sides

Extended adjustable baseplates for submerged fixing

Powder Coating to a wide range of colours

LED or solar lighting

Full Installation Service

Varied Range of Cycle Racks

Varied Range of Cycle Stands

Colours/Finishes



THE COLOURS SHOWN ARE A GUIDE ONLY.
PLEASE CHECK A COLOUR CHART TO SEE THE
ACTUAL COLOUR.

Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information)