


## BXMW/Hi-RISE Hi-Rise Two Tier System



### Specifications:

- Cycle storage unit to accommodate 20 cycles 10 at ground level, 10 on the upper level.
- Upper level fitted with high/low retractable elements that can be lowered.
- Overall length: 4000mm
- Frame Work Finish: Galvanised to BS EN ISO 1461:2009
- Lower Cycle Rack Finish: Galvanised to BS EN ISO 1461:2009
- Upper Troughs/Runners Finish: Galvanised
- Handles Finish: Galvanised to BS EN ISO 1461:2009 & polyester powder coated RAL 1023, Yellow

### Options:


- BREXAM compliant configurations available by request
- Lower tier options of cycle racks or troughs available by request.
- Gas struts to convert to 'Easy Riser' lift assist can be retro fitted.

### Please note:

The overall recommended minimum working height required is 2700mm.

(N.B. 20kg weight limit).

\* Please note, Apollo Shelter is not included with the Hi-Rise Two Tier System unless it has been specified.

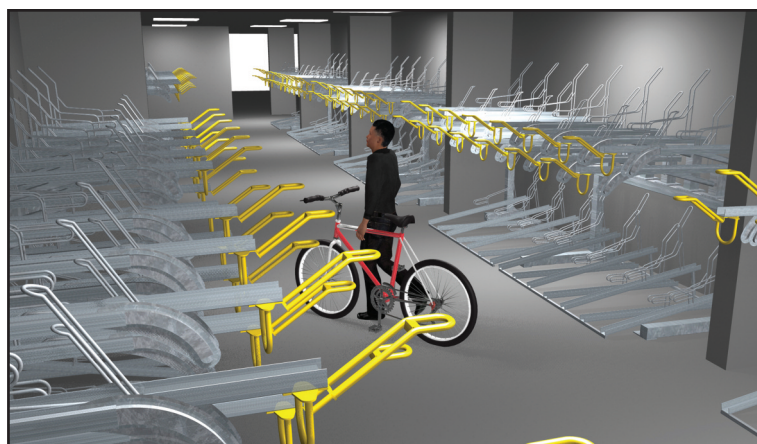

### Broxap Limited

Rowhurst Industrial Estate, Chesterton,  
Newcastle-under-Lyme, Staffordshire ST5 6BD

Tel: +44 (0)1782 564411

Fax: +44 (0)1782 565357/562546

E.mail: sales@broxap.com · Web: www.broxap.com

### LIFT ASSIST VERSION NOW AVAILABLE

We can now supply a 'lift-assist' version of this storage system. Our 'Easi-Riser™' version offers a gas-strut mechanism that reduces the lifting weight by 6-7kg's.

**Call for more details on  
the Easi-Riser™**