

Anti-Vandal Wardale Cycle Shelter BXMW/AV-WAR-SHELTER

broxap
cycle parking & storage



Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

4100mm (10 Cycles)
5000mm (12 Cycles)

Other sizes available POA

Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Anti-Vandal Wardale® cycle shelter is a robust version of our popular and best-selling Wardale. With its modular design the Anti-Vandal Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Anti-Vandal Wardale cycle shelter includes a sliding gate and mechanical code locks for extra security.

Features

- Trapezoidal Metal Profile roof cladding
- 5mm PETg UV Side Panels complete with 5mm mesh
- Robust modular construction
- Adjustable baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009 and Powder Coated
- Mechanical Code Locks
- Space Saving Sliding Gate

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

Anti-Vandal Wardale Cycle Shelter BXMW/AV-WAR-SHELTER



Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- 5mm PETg UV Roof Panels complete with 5mm mesh
- 6mm polycarbonate for roof and sides complete with 5mm mesh
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- LED or solar lighting
- Full Installation Service

Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

4100mm (10 Cycles)
5000mm (12 Cycles)


Other sizes available POA

Colours/Finishes:


	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

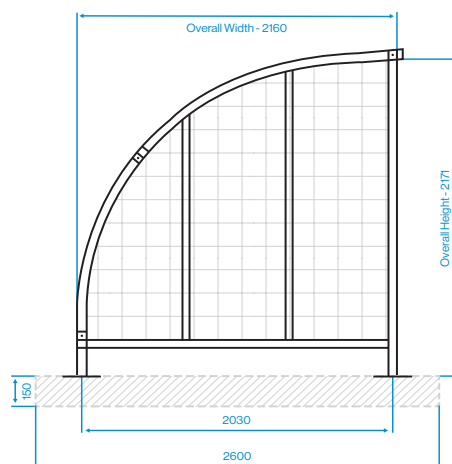

Installation

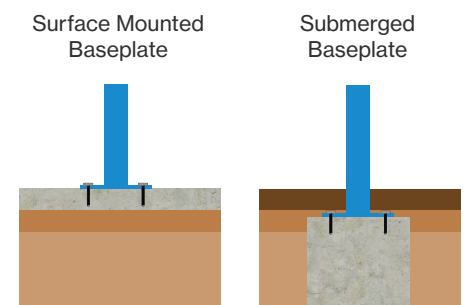

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

