



Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the
actual colour.

Product Information

The Regal cycle shelter uses the basis of the Wardale design whilst utilising angled front end frames which add a modern look to the traditional design, with modular units the Regal cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.

Features

- Polycarbonate End Panels Included
- Robust modular construction featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm ClearView PEGg UV roof and side cladding (5mm also available)
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options

- Steel profile, trapezoidal roof cladding
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Helmet lockers
- Powder coated to a wide range of colours
- LED or solar lighting
- Full Installation Service

Diagram

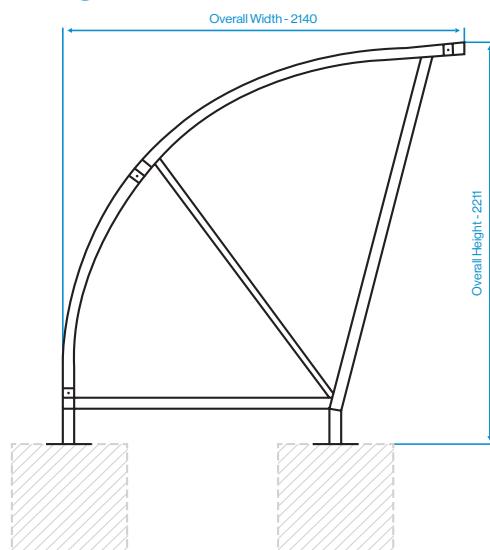

Installation

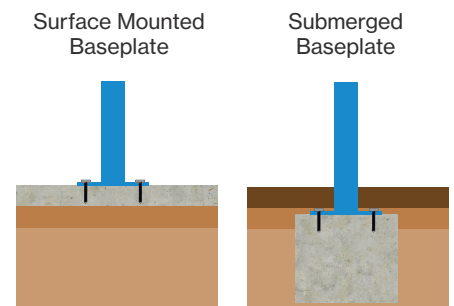













Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com