Beech Grove Entrance Canopy BXMW/BG-ENFO





Product Information

A modest, attractive design with a decorative lattice beam to either side, complete with built in rainwater management draining through the uprights the Beach Grove is an effective and economical solution to covering an Entrance or Doorway.

Features

.

- 4mm Clear View PETg UV
- Submerged fixing
- Integral Guttering
- Anti-Climb End Frames
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section assembled with anti-tamper high strength bolts
- Hot dipped galvanized

Materials Used

- Framework Mild steel
- Cladding 4mm ClearView PETg UV roof
- Fasteners Zinc plated
- Cover Strips Aluminium capex

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com













-

All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,EW) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

Framework Colours/Finishes:

Standard Unit Dimensions:

Length: 2000mm

Width: 2000mm

Height: 2457mm



The colours shown are a guide only. Please check a colour chart to see the

actual colour.

BUILDER'S

PROFILI

Beech Grove Entrance Canopy BXMW/BG-ENFO



Weather Resistance

Cladding is UV Stabilised Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options


- Bespoke Sizes on Request
- Opal Cladding to the roof
- Powder Coating to a wide range of colours
- LED lighting or solar lighting
- Full installation service

Diagram

Installation

Submerged Baseplate



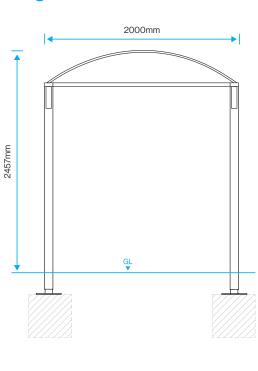

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com





RSPA Member



CHAS





All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

2

Standard Unit Dimensions:

Length: 2000mm Width: 2000mm Height: 2457mm

Framework Colours/Finishes: RAL 9006 RAL

White

Δluminium

RAL 3020

Traffic Red

RAL 1023

Fraffic Yellov

RAL 5013

Dark Blue

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Galvanised Only

mbus Gre

Mid Blue

RAL 7016

Anthracite

Grev

BAL 9005

let Black

BS 4800

00 A 05

Goose Grey

RAL 9016

Traffic White