

Cycle Parking Specification Sheet

Crewe Cycle Rack BXMW/CRE



Standard Unit Dimensions:

Width: 1590mm
Top Rail Diameter: 76mm

Length with Capacities:

3000mm (4 Cycles)

Colours/Finishes:



Grade 304 stainless steel (matt satin finish)

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

This sleek design provides a unique cycle storage solution which complements any existing modern or contemporary surroundings. The cycle rack itself is suited to 4no. cycles and is ideal for an on street cycle parking scenario.

Features

- Grade 304 stainless steel
- Matt satin finish
- Root fixed
- 4 no. cycle stands
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

Materials Used

- Framework - Grade 304 stainless steel

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Stainless Steel
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N.S.E.W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Available in either hot dip galvanised to BS EN ISO 1461:2009, stainless steel, or polyester powder coated (POA)

Diagram

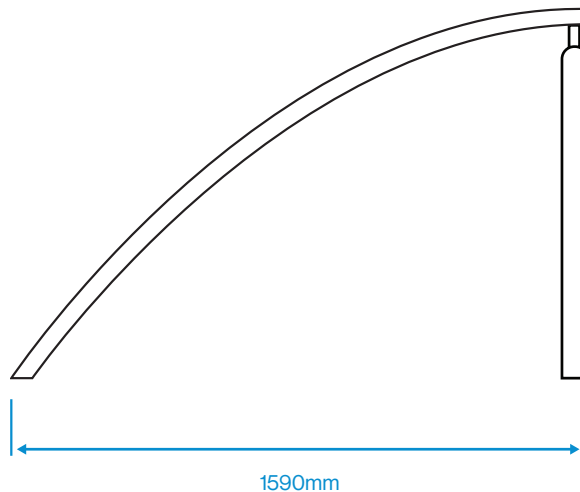

Standard Unit Dimensions:

Width: 1590mm
Top Rail Diameter: 76mm

Length with Capacities:

3000mm (4 Cycles)

Colours/Finishes:



Grade 304 stainless steel (matt satin finish)

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com