

## Wardale® Two Tier Cycle Shelter BXMW-WAR-TWO-TIER





### Standard Unit Dimensions:

Width: 3191mm  
Height: 3000mm

### Length with Capacities:

3600mm (16 Cycles)  
4100mm (20 Cycles)  
5000mm (24 Cycles)

### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Wardale® Two Tier cycle shelter uses the best selling Wardale design while utilising the space saving Easi-Riser Two Tier Cycle Parking System (sold separately). Available with Fully Enclosed or Open Extension End frames, The Wardale Two Tier Shelter provides the most protection from the elements of all of our two tier shelters.

## Features

- Robust Modular Construction Featuring Load Bearing Purlins
- Welded End Frames and Purlin Section Made From Heavy-Duty Box Section Assembled with Anti-Tamper High Strength Bolts
- Anti-Climb End Frames
- Adjustable Baseplates
- Bottom Purlin Provides Anti-Crawl Bar on Level Surface
- Hot Dipped Galvanized to BS EN ISO 1461:2009
- 4mm Clear View PETg UV Roof and Side Cladding
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

## Materials Used

- Framework - Mild Steel
- Cladding - 4mm PETg UV
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

## Wardale® Two Tier Cycle Shelter BXMW-WAR-TWO-TIER

### Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply


### Options

- Steel Profile, Trapezoidal Roof Cladding
- Open or Enclosed Extension End Frames
- Extended Adjustable Baseplates for Submerged Fixing
- Swinging Security Gates
- Digital Mechanical or Keyed Locks
- Further Anti Crawl Bars can be fitted Dependant on Surface Level
- Powder Coating to a wide range of colours
- LED or solar lighting
- Multiple Banks to Increase Cycle Capacity
- Full Installation Service

### Diagram

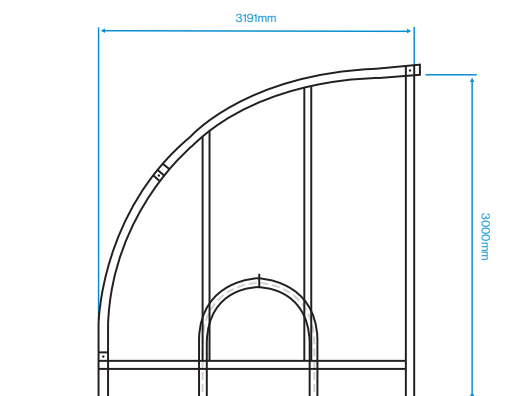

### Installation

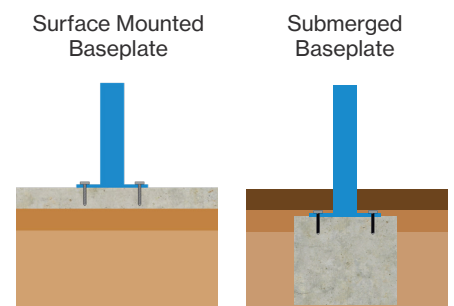

#### Standard Unit Dimensions:

Width: 3191mm  
Height: 3000mm

#### Length with Capacities:

3600mm (16 Cycles)  
4100mm (20 Cycles)  
5000mm (24 Cycles)

#### Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com