















### Standard Unit Dimensions:

Length:  
5000mm

Width:  
4848mm

Height:  
2500mm to eaves

### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Cambridge is a versatile, modular and elegant canopy. It makes a fantastic covered area when a group are installed together. It is available in a variety of roof styles. This architecturally pleasing design is constructed from heavy duty steel section and is assembled with anti-tamper proof high strength bolts. The walkway canopy also features a ClearView PETg UV roof allowing maximum light to flow through the structure, creating a relaxing and airy environment. This contemporary style shelter has the capabilities of adding extensions without drilling or welding. This product is protected by U.K. Design Registration Laws, which prohibit unauthorised copying in any form.

## Features

- 4mm ClearView PETg UV roof
- True modular design, extensions added without drilling/welding
- May extend from existing roof giving full protection from inclement weather
- Provides UVA/UVB protection
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts
- Hot dipped galvanized to BS EN ISO 1461:2009

## Materials Used

- Framework - Mild steel
- Cladding - 16mm structured multi-wall polycarbonate
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

## Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply



### Options

- Bespoke Versions Available
- Trapezoidal Roof Cladding (other finishes available)
- Polyester powder coated to a standard colour
- Can be formed into high security compounds with compatible shelters
- Full installation service
- Internal lighting or solar lighting

#### Standard Unit Dimensions:

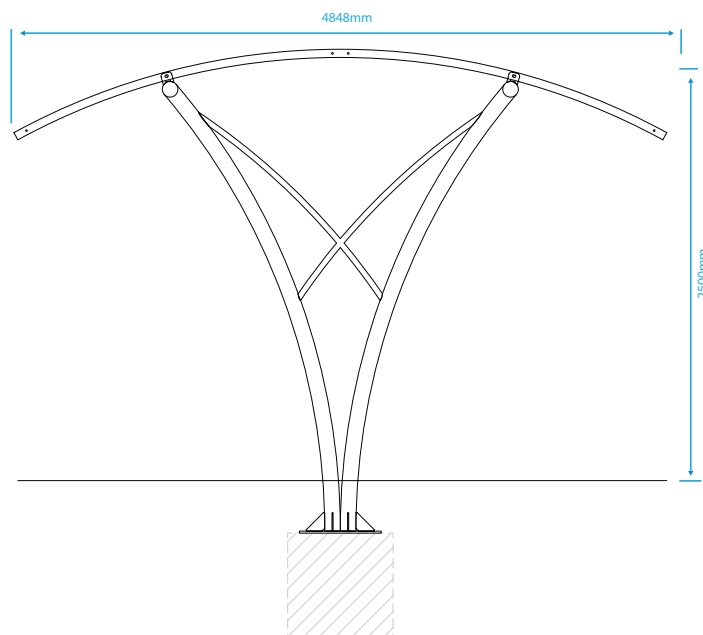
Length:  
5000mm  
  
Width:  
4848mm  
  
Height:  
2500mm to eaves

#### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

### Diagram



### Installation

