# Easi-Riser Cycle Parking System **BXMW/EASI-RISER**





### **Standard Unit Dimensions:**

Height: 1800mm Length: 9100mm (4 Cycles)

#### **Length with Capacities:**

1286mm (6 Cycles) 1660mm (8 Cycles) 1700mm (10 Cycles) 2075mm (12 Cycles) 2450mm (14 Cycles) 2825mm (16 Cycles) 3200mm (18 Cycles) 3575mm (20 Cycles)

### Finish:



Galvanised Only Finish

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

## **Product Information**

The Easi-Riser is more compact than other two-tier options - this makes it ideal for spacesaving storage when ceiling height is a consideration.

This two-tier cycle storage system is a cost effective option for space-saving cycle storage. Not only this, but the Easi-Riser includes a gas strut mechanism as standard - this makes operation of the upper level troughs exceptionally easy and all the more accessible.

## **Features**

- Each set of four "cycle spaces" consists of two upper-tier troughs and one lower-tier Sheffield hoop.
- Sheffield racks can be easily swept clean.
- Staggered upper level troughs allow for varying cycle hand bars to avoid clashing and enable easy operation.
- Gas strut lift assist mechanism for easy loading/unloading on upper tier.
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

### **Materials Used**

Framework - Mild Steel

## **Finish Options**

Galvanised to BS EN ISO 1461:2009

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

















## Easi-Riser Cycle Parking System **BXMW/EASI-RISER**




## Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural quarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour


## **Options**

- Sizes options based on cycle capacity
- Finish: framework, lower rack and upper trough/runners are galvanized only

## **Diagram**



## **Operating Space**

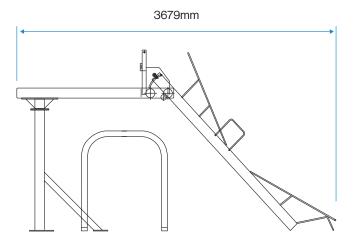

### **Standard Unit Dimensions:**

Height: 1800mm Length: 9100mm (4 Cycles)

### **Length with Capacities:**

1286mm (6 Cycles) 1660mm (8 Cycles) 1700mm (10 Cycles) 2075mm (12 Cycles) 2450mm (14 Cycles) 2825mm (16 Cycles) 3200mm (18 Cycles)

### Finish:

3575mm (20 Cycles)



The colours shown are a guide only. Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com















<sup>\*</sup>Maintenance and other qualifying criteria apply