

Harrowby Smoking & Vaping Shelter BXMW/HAR



Standard Unit Dimensions:

3, 6, 8 & 11 people

Lengths:

2110mm, 3135mm & 4160mm

Widths:

1040mm, 1540mm & 2040mm

Height:

2253mm

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

The popular Harrowby shelter has been adapted to produce a versatile, robust smoking and vaping shelter. Available in four sizes, the shelter also comes with the option of having the side panels split either horizontally or vertically to provide sufficient free area to the perimeter to comply with smoking legislation.

The vertically split version benefits from being clad to full height at the rear of the shelter and half of the side, whilst the horizontally split version benefits from increased protection across the width of the shelter but is only clad half height throughout. Economical, steel framed smoking and vaping shelter with ClearView PETg UV cladding and roof. Curved back allows water to shed to the rear.

Features

- ClearView PETg UV sheeting giving all round visibility
- Perch seating
- Cigarette bin
- Base plate fixing
- Full height
- Adjustable feet
- Conforms to all smoking legislation

Materials Used

- Mild steel welded end frames and purlin section made from heavy duty box section
- Anti-tamper high strength bolts

Finish Options

- Hot dip galvanised to BS EN ISO 1461:2009
- Polyester powder coated paintwork in 19 RAL colours

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Submerged fixing
- Lighting
- Polyester powder coated to a standard colour
- Litter bin
- Alternative PETg UV finishes

Standard Unit Dimensions:

3, 6, 8 & 11 people

Lengths:

2110mm, 3135mm & 4160mm

Widths:

1040mm, 1540mm & 2040mm

Height:


2253mm

Colours/Finishes:

	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

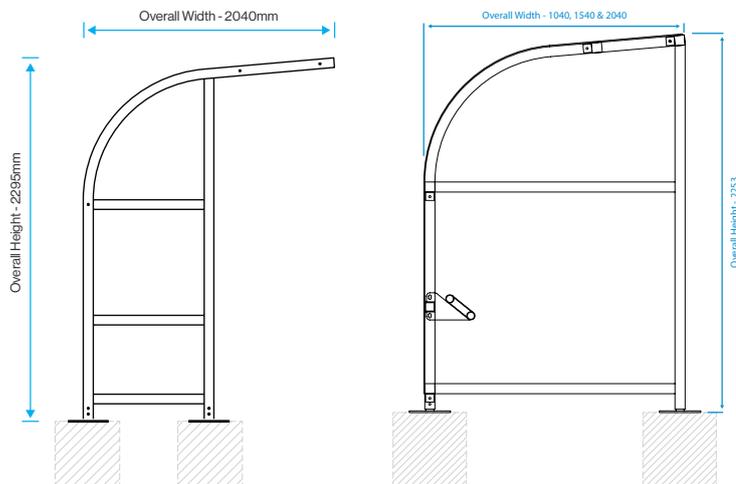

Vertically Clad Diagram

Horizontally Clad Diagram

Installation

