













Standard Unit Dimensions:

Length:
4100mm

Width:
2140mm

Height:
2150mm

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The special end shape allows the occupants to see the action at both ends of the ground no matter what the prevailing weather conditions. This functional shelter gives 180 degree visibility complete with overhead protection and includes 8 flip-up seats.

The Littleborough Dugout shelter is ideal for use at football clubs or sports grounds where managers, competitors or officials need shelter from inclement weather. The unique curve of the shelter gives an expanded view of the playing area whilst keeping occupants dry.

Features

- Polycarbonate End Panels Included.
- Robust modular construction featuring load bearing purlins.
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts.
- Anti-climb end frames.
- Adjustable base plates.
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm ClearView PETg UV roof and side cladding (5mm also available)
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETg uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

Littleborough Dugout Shelter BXMW/LTD



Finish Options

- Hot dip galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

**Maintenance and other qualifying criteria apply*


Options

- HPS Colourcoat Steel Profile Cladding
- Opal Cladding to Roof and Sides
- Extended Adjustable Baseplates for Submerged Fixing
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Diagram

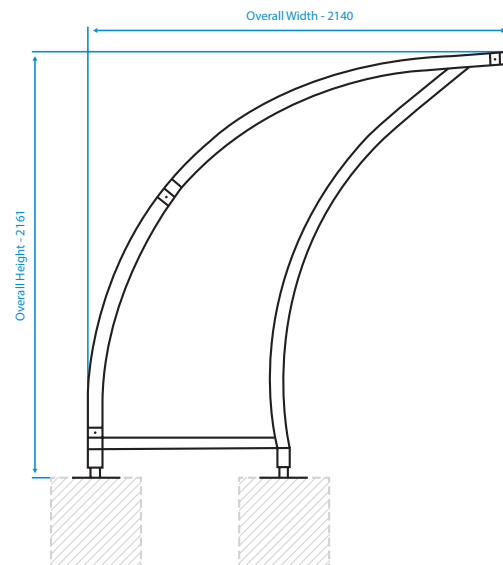

Installation

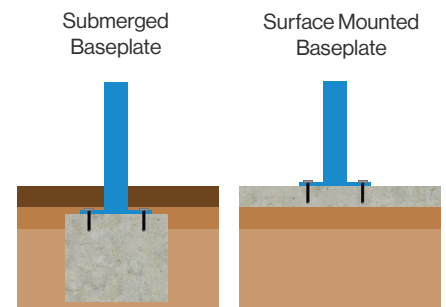

Standard Unit Dimensions:

Length:
4100mm

Width:
2140mm

Height:
2150mm

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

