

Delamere Timber Monopitch Canopy BXMW/DEL-MONO



Standard Unit Dimensions:

Bespoke sizes to suit customer requirements

Framework Material:



Softwood Timber

Product Information

The Delamere Monopitch Canopy is one of our most popular timber canopies offering a beautiful natural finish along with strength and durability.

The flat monopitch roof features a high strength structural multiwall polycarbonate cladding. Corners and bends can be easily accommodated using hip joints or individual canopies which overlap. The Delamere Monopitch can also accommodate side panels to form a partially or fully enclosed outdoor area, making the Delamere Monopitch one of our most versatile timber canopies.

The width, height and column spacing's can all be adapted to suit the existing surroundings.

Features

- Steel Fin Connection Baseplates
- Softwood Timber
- Multiwall Polycarbonate Roof Cladding

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Delamere Timber Monopitch Canopy BXMW/DEL-MONO

broxap
shelters & canopies

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour
- 10 year timber guarantee*

*Maintenance and other qualifying criteria apply


Options

- Glazed Roof Cladding
- Opal, Clear or Bronze Cladding to Roof and Side Panels
- Side Panels in PETg UV/ Multiwall / Glass or PVC Roll up Blinds
- Uprights can be solid leg or composite leg
- Guttering & Downpipes: Aluminium or UPVC
- Aluminium Profile Weather Resistant Barriers
- Fixing: Fin Connection Submerged Base Plates, or Wall Fix to building can also be considered with front leg supports only
- Finish: Glulam Beams
- LED lighting or solar lighting
- Full installation service

Diagram

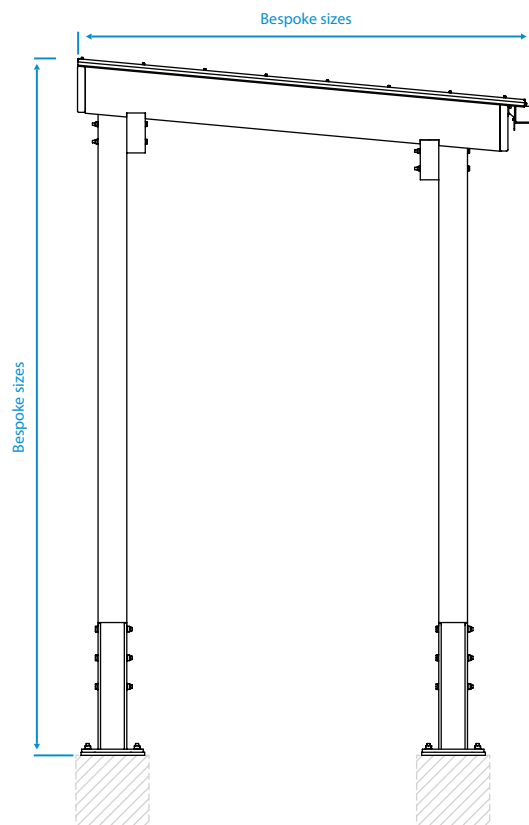

Installation

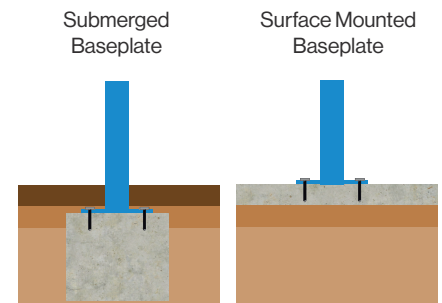

Standard Unit Dimensions:

Bespoke sizes to suit
customer requirements

Framework Material:



Softwood Timber

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

