

Duracast™ Polyurethane (PU) conversions

Bollard and rail

Bollards can be converted to accept rail. Several standard adaptations including corners, intersections, terminals and junctions are available for bollard and railing systems.



Bollard and panel

Broxap can convert a variety of bollards to accept galvanized steel panels. Broxap's standard panels are supplied in 2 metre lengths with 12mm dia. or 16mm dia. solid steel infill bar options.




High visibility panels are available. This type of panel is of a similar specification to the standard panel, however, the infill bars are offset to allow for increased visibility between pedestrians and drivers of vehicles. This is particularly important outside schools or on street corners.

Bollard and chain

Bollards can be converted to accept chain. Galvanized eyebolts are fitted to the bollard allowing chain attachment via split/mending link.

Broxap offer the following types of heavy duty, galvanized chain:



33mm x 6mm

Galvanized plain link chain.



50mm x 6mm

Galvanized chain, alternate spikes.




Eye bolt connector



Sprung hook connector



Split/mending link connector

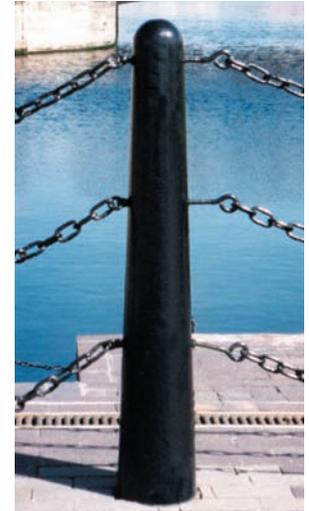

Sales support

Our sales advisors are able to guide you and provide practical advice for your requirements.

Duracast™ Polyurethane (PU) finishes/ highlighting

Standard colour range

Broxap offer a choice of four standard colours, however, the full BS and RAL specification range is available, though this may incur an extra cost, please contact one of our specialist sales advisors for further information.

The standard colours, shown right, are a guide only. Due to the limitations of the printing process colours may vary, please obtain an actual colour sample for a true representation.



telephone: 01782 564411

fax: 01782 565357/562546