















Standard Unit Dimensions:

Length:
4692mm

Width:
2346mm

Height:
2566mm

Colours/Finishes:

 Galvanised Only	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the
actual colour.

Product Information

Galvanized only as standard but can be polyester powder coated in a wide range of RAL or BS colours at an extra cost.

Contemporary styled shelter that is perfectly shaped to shield from wind and weather, whilst still providing a large area to stand or sit. Shelter includes mild steel integral seating with steel slats.

Features

- Hot dip galvanised to BS EN ISO 1461:2009 as standard
- ClearView PETg UV sheeting to produce excellent visibility
- Integral seat supports complete with steel seat slats
- Aluminium channel section cover strip provides water-tight seal between ClearView PETg UV sheeting and framework
- Circular hollow section frame supports facilitate internal wiring to central light source at front of shelter

Materials Used

- Lightweight circular frame construction (modular)
- Below ground base plate detail

Finish Options

- Hot dip galvanised to BS EN ISO 1461:2009
- Polyester powder coated paintwork in 19 RAL colours

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Smoke Dome Smoking & Vaping BXMW/SMO

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Internal lighting or solar lighting
- Timber Slatted Seating
- Free-standing cigarette bin, gum/ash bin
- Can be polyester powder coated in a wide range of RAL or BS colours
- Full installation service










Standard Unit Dimensions:

Length:
4692mm

Width:
2346mm


Height:
2566mm

Colours/Finishes:


		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

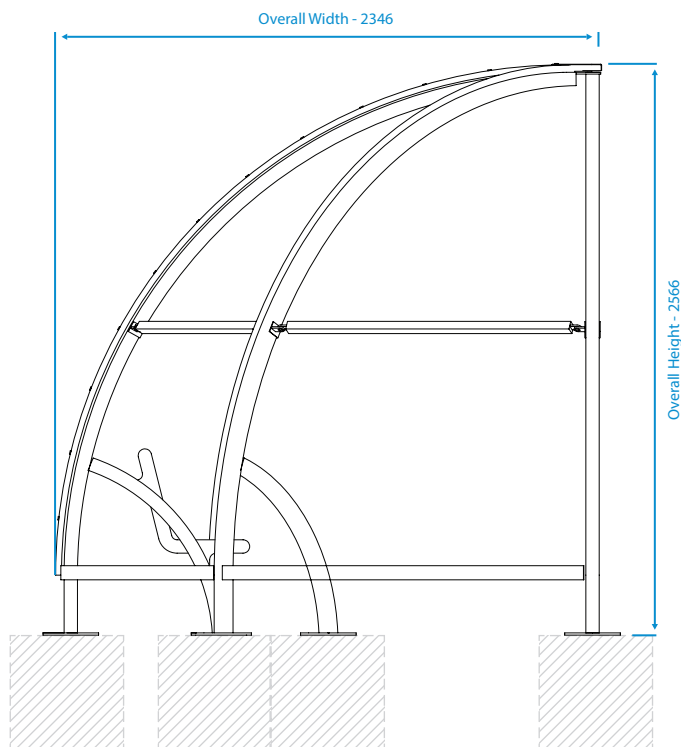

Installation

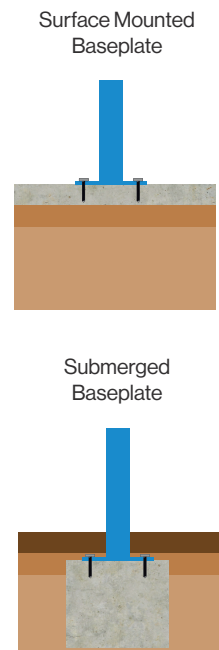

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

