



Standard Unit Dimensions:

Length: 4100mm
Width: 2250mm
Height: 2200mm

Length with Capacities:

4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Coventry Cantilever is a contemporary and minimalistic cycle shelter, cantilever in design the Coventry Cantilever offers a light and airy shelter with unobtrusive end frames, modular in design, the Coventry Cantilever can also be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.

Features

- Robust modular construction
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Submerged Baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009
- 16mm Structured Multiwall Polycarbonate Roof Cladding
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options

- Steel profile, trapezoidal roof cladding
- Powder coating to a wide range of colours
- LED or Solar Lighting
- Multiple banks to increase cycle capacity
- Full Installation Service

Diagram

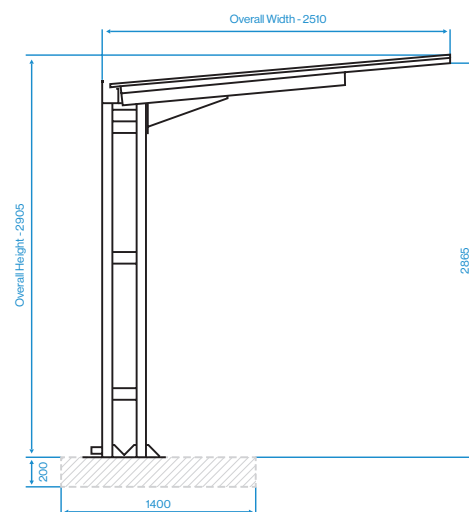

Installation



Standard Unit Dimensions:

Length: 4100mm
Width: 2250mm
Height: 2200mm

Length with Capacities:

4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.