

## Cycle Drum Cycle Shelter BXMW/DRUM




### Standard Unit Dimensions:

Width: 2700mm  
Height: 1650mm

### Length with Capacities:

2150mm (4 cycles)  
2600mm (6 cycles)

### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

Broxap's Cycle Drum shelter is an ideal space saving solution, designed to fit where space is at a premium. This secure shelter can store up to 6 cycles by utilising 3 cycle stands at 800mm centres (sold separately) or can also be utilised as a buggy shelter.

## Features

- Space saving
- Robust modular construction
- Adjustable feet
- Rear/Side and door cladding in plasitisol flat sheet
- Aluminium door frame with spring loaded assisted door closure
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Hot dip galvanised to BS EN ISO 1461:2009
- Weather resistant cladding

## Materials Used

- Framework - Mild Steel
- Cladding - Plastisol Sheetting
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat
- Door Frame - Light Weight Aluminium

## Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461:2009
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



## Cycle Drum Cycle Shelter BXMW/DRUM

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply


### Options

- Custom vinyl graphics
- PETg UV clad 'see-through' door, sides and roof
- Internal lighting or solar lighting
- Installation service available
- Full range of BS and RAL colours available
- Steel profile, trapezoidal roof cladding
- Extended adjustable baseplates for submerged fixing
- Digital mechanical or keyed locks
- Powder coating to a wide range of colours
- Varied range of Cycle Racks
- Varied range of Cycle Stands

### Diagram

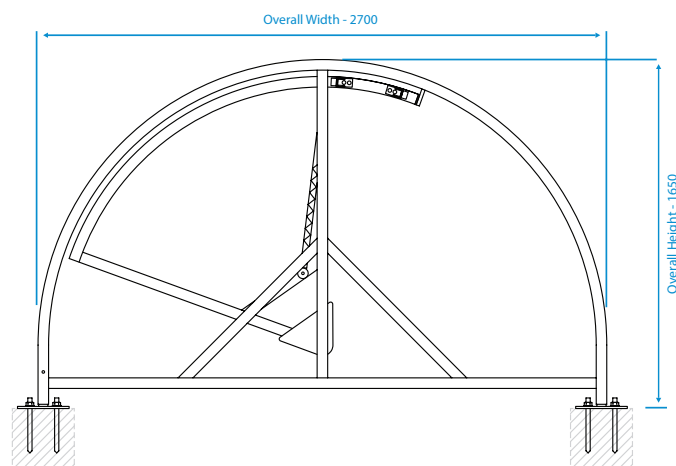

### Installation

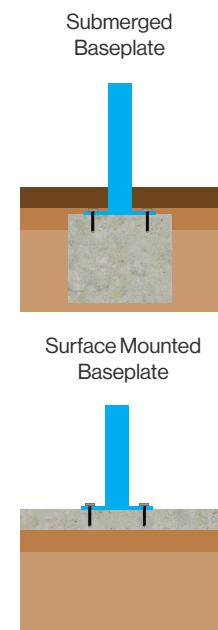

#### Standard Unit Dimensions:

Width: 2700mm  
Height: 1650mm

#### Length with Capacities:

2150mm (4 cycles)  
2600mm (6 cycles)

#### Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

