

Cycle Shelters Specification Sheet

Premier Cycle Shelter BXMW/PREM

broxap[®]
cycle parking & storage



Standard Unit Dimensions:

Length: 4100mm
Width: 2500mm
Height (Front): 2314mm
Height (Rear): 2100mm

Length with Capacities:

4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Premier Cycle Shelter is a robust shelter which provides an excellent solution to cycle storage, featuring welded frames made from heavy-duty square steel sections.

Features

- Robust modular construction
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Submerged baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009
- 16mm structured multiwall polycarbonate roof cladding
- Breeam compliant configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N.E.W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information.

Premier Cycle Shelter BXMW/PREM

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

**Maintenance and other qualifying criteria apply*

Options

- Steel Profile, Trapezoidal Roof Cladding
- Powder coating to a wide range of colours
- LED or solar lighting
- Multiple banks to increase cycle capacity
- Full Installation Service













Standard Unit Dimensions:

Length: 4100mm
Width: 2500mm
Height (Front): 2314mm
Height (Rear): 2100mm

Length with Capacities:


4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

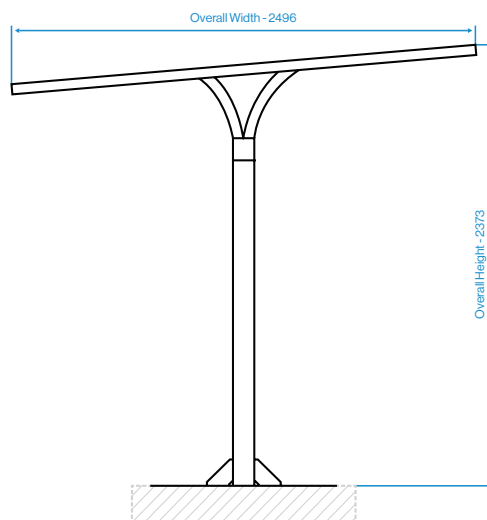

Installation

