



Standard Unit Dimensions:

Length: 4100mm

Width: 4000mm

Height: 2300mm

Bespoke sizes on request

Colours/Finishes:

	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Newcastle Senior offers a Symmetric style roof which is ideal for spanning larger doorways and entrances. This stylish canopy can be fitted with side panels to create a partially enclosed entrance foyer or with lattice beams to transverse larger areas without the need for intermediate uprights, lattice beams can also be added for decorative purposes.

Features

- Multiwall Polycarbonate or PETg UV roof cladding
- Base plate or submerged fixing
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts
- Hot dipped galvanized to BS EN ISO 1461:2009

Materials Used

- Framework - Mild steel
- Cladding - Multiwall Polycarbonate or PETg UV roof
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options

- Bespoke Sizes on Request
- Side Panels in PETg or UV roof cladding
- Opal or Bronze Cladding on the roof and side panels
- Powder Coating to a wide range of colours
- UPVC or Aluminium Guttering
- Aluminium Profile Weather Resistant Barriers
- Wall Mounting to Rear (Dependant on Suitability of Existing Structure)
- LED Lighting or solar lighting
- Full installation service

Diagram

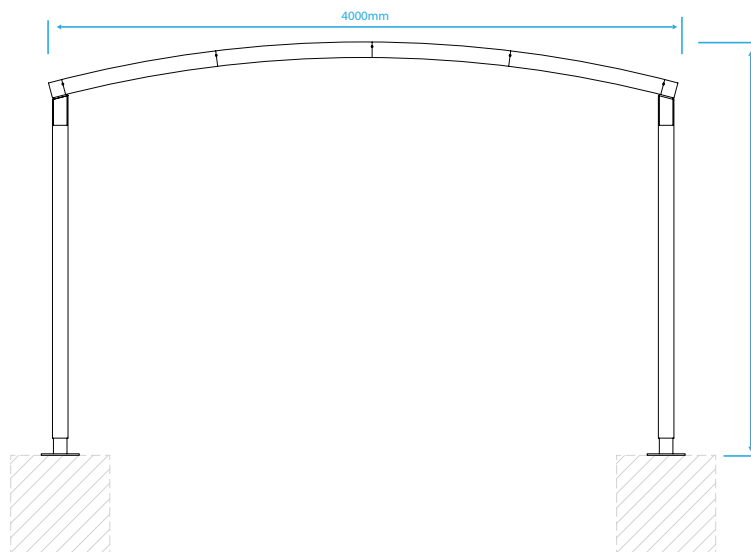

Installation



Standard Unit Dimensions:

Length: 4100mm

Width: 4000mm

Height: 2300mm

Bespoke sizes on request

Colours/Finishes:

	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.