

## Coventry Gullwing Cycle Shelter BXMW/COV/GU



### Standard Unit Dimensions:

Width: 4885mm  
Height: 2200mm

### Length with Capacities:

3600mm (8 cycles)  
4100mm (20 cycles)  
5000 (24 cycles)

### Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Coventry Gullwing presents a sleek, contemporary and minimalistic cycle shelter. It has the practicality of being able to accommodate up to 24 cycles under one unit. Modular in design the Coventry Gullwing Cycle Shelter can be linked to form banks of shelters to accommodate large quantities of cycles with access from both sides of the shelter.

## Features

- Robust Modular Construction
- Welded End Frames and Purlin Section Made From Heavy-Duty Box Section Assembled with Anti-Tamper High Strength Bolts
- Submerged Baseplates
- Hot Dipped Galvanized to BS EN ISO 1461:2009
- 16mm Structured Multiwall Polycarbonate Roof Cladding
- Breeam Compliant Configurations

## Materials Used

- Framework - Mild Steel
- Cladding - 16mm Structured Multiwall Polycarbonate
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

## Finish Options

- Hot-Dip Galvanized to BS EN ISO 1461:2009
- Hot-Dip Galvanized & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanized with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



## Coventry Gullwing Cycle Shelter BXMW/COV/GU

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply


### Options

- Steel Profile Trapezoidal Roof Cladding
- Powder coating to a wide range of colours
- LED or Solar Lighting
- Multiple banks to increase cycle capacity
- Full Installation Service
- Varied range of Cycle Racks
- Varied range of Cycle Stands

### Diagram

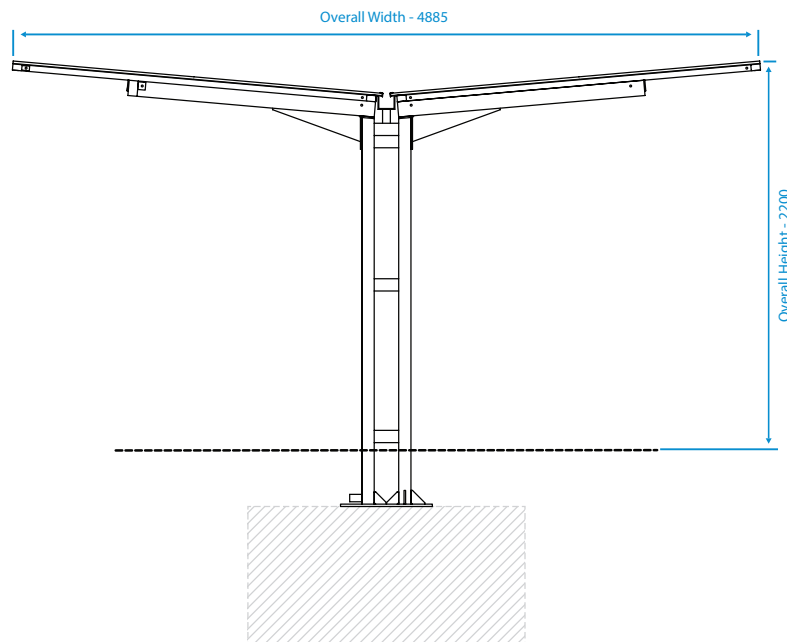

### Installation









#### Standard Unit Dimensions:

Width: 4885mm  
Height: 2200mm

#### Length with Capacities:

3600mm (8 cycles)  
4100mm (20 cycles)  
5000 (24 cycles)

#### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

