



### Standard Unit Dimensions:










Width: 5000mm  
Height: 2200mm

### Length with Capacities:

4100mm (20 cycles)

Sizes can vary as required

### Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

Strong and robust contemporary style cycle compound with integral lighting and lockable gates, to the rear is a covered and lit parking area for scooters and motorcycles. Perforated steel panels mixed with reinforced multi-wall polycarbonate graphic livered panels.

A solution for the storage of student and lecturer cycles/motorcycles. This compound has high visibility mesh panning sides mixed with bespoke signage. Cycles inside the compound are secured to Sheffield cycle stands and there is a covered yet open sided area with floor mounted security anchors for moped and motorcycle riders.

## Features

- Robust mild steel SHS bolted steelwork
- Perforated sheet metal cladding mixed with reinforced multi-wall polycarbonate with graphics display.
- Unit price includes graphics
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

## Materials Used

- Framework - Mild steel SHS bolted steelwork
- Cladding - Perforated sheet metal cladding mixed with reinforced multi-wall polycarbonate

## Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001  
Quality  
Management  
Systems  
CERTIFIED

ISO 14001  
Environmental  
Management  
CERTIFIED

ISO 45001  
Occupational  
Health and Safety  
Management  
CERTIFIED



### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to '1Y' for BS 476

### Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply


### Options

- Sizes can vary as required.
- Cycle racks
- Lighting
- Full installation service

### Diagram

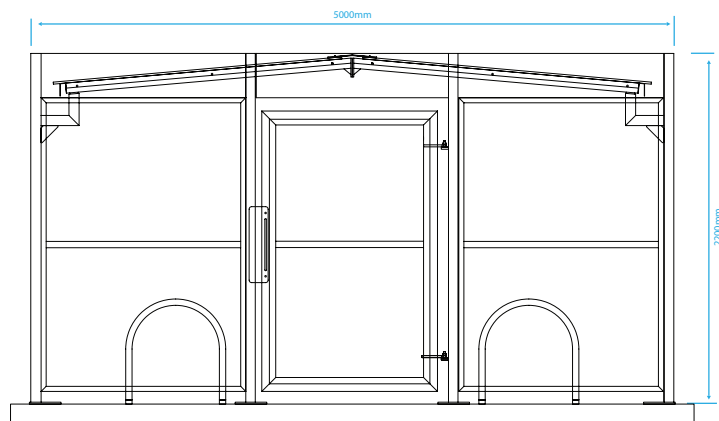

### Installation

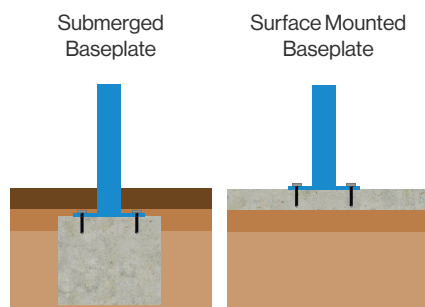

#### Standard Unit Dimensions:

Width: 5000mm  
Height: 2200mm

#### Length with Capacities:

4100mm (20 cycles)

Sizes can vary as required

#### Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

