



Standard Unit Dimensions:

Length:
4100mm or 5000mm

Width:
2200mm

Height:
Bespoke to suit requirements

Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

The Hartcliffe Walkway offers a cantilever design available with a curved, asymmetric or flat, monopitch roof with uprights down one side only. This is ideal for applications where two rows of uprights cannot be accommodated due to obstructions (E.g Existing services near a building, Doorways, Windows etc). Corners and bends can be easily accommodated using hip joints.

The Hartcliffe can also accommodate side panels to one side form a partially enclosed walkway.

Features

- Clear View PETg UV roof cladding
- Submerged Fixing
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts

Materials Used

- Framework - Mild steel
- Cladding - 16mm structured multi-wall polycarbonate
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED



Hartcliffe Walkway BXMW/HART

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Side Panels in PETg or Glazed Finish
- Opal Cladding on the roof and side panels
- Powder Coating to a wide range of colours - £POA
- UPVC or Aluminium Guttering
- LED lighting or solar lighting
- Full installation service

Standard Unit Dimensions:

Length:
4100mm or 5000mm

Width:
2200mm


Height:
Bespoke to suit requirements

Colours/Finishes:


	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

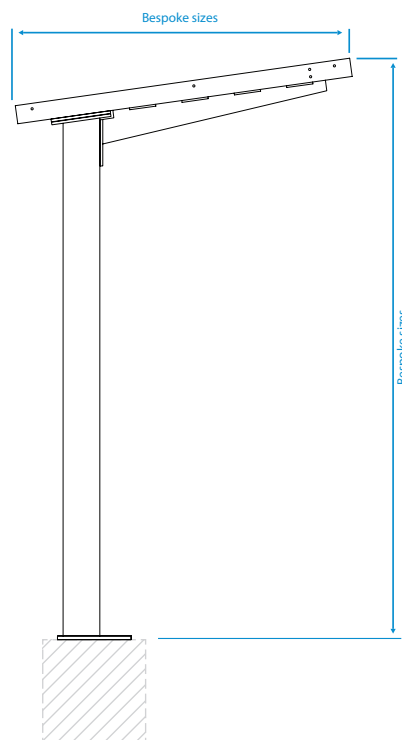

Installation



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED

