

Access Control Specification Sheet

Counterbalance Barrier BX015515

broxap
bollards & barriers



Standard Unit Dimensions:

Length: Specified by customer
Maximum Recommended Span:
6000mm
Above Ground Height: 1000mm

Colours/Finishes:

RAL 9005 Jet Black	RAL 9016 Traffic White	RAL 7016 Anthracite Grey
RAL 5013 Colbalt Blue	BS 4800 20 C 40 Duchess Blue	BS 4800 00 A 05 Goose Grey
RAL 6005 Green	BS 4800 14 C 39 Holly Green	BS 4800 18 B 25 Admiral Grey
RAL 5015 Sky Blue	RAL 3020 Traffic Red	RAL 1023 Traffic Yellow

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

Mild steel single arm barrier comprising latch post, Boom and Boom support post. Galvanised and polyester powder coated to a Broxap standard colour. The Counter Balance barrier can be locked using a padlock in the closed or open position. Padlocks are sold separately.

Features

- Mild steel single arm barrier
- Galvanised and polyester powder coated to a single Broxap colour
- Galvanised to BS EN ISO 1461:2022
- On site assembly required (assembly fixing bolts supplied - excludes foundation bolts)

Materials Used

- Mild Steel

Options

- Padlock
- Removable central post
- Length of the post


Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).


Counterbalance Barrier BX015515

Diagram

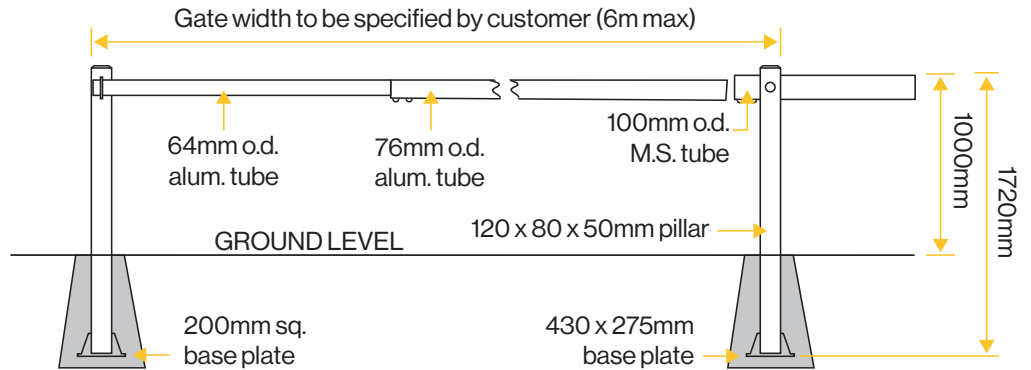

Installation

Root Fixed

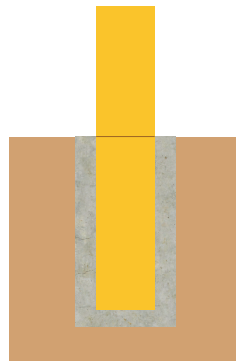

Standard Unit Dimensions:

Length: Specified by customer

Maximum Recommended Span:
6000mm

Above Ground Height: 1000mm

Colours/Finishes:

RAL 9005 Jet Black	RAL 9016 Traffic White	RAL 7016 Anthracite Grey
RAL 5013 Colbalt Blue	BS 4800 20 C 40 Duchess Blue	BS 4800 00 A 05 Goose Grey
RAL 6005 Green	BS 4800 14 C 39 Holly Green	BS 4800 18 B 25 Admiral Grey
RAL 5015 Sky Blue	RAL 3020 Traffic Red	RAL 1023 Traffic Yellow

The colours shown are a guide only.
Please check a colour chart to see the
actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED

