

Newcastle Monopitch Canopy BXMW/NEWS/MONO



Standard Unit Dimensions:

Lengths:
3000mm, 4000mm & 5000mm

Widths:
2000mm, 2500mm, 3000mm,
3500mm, 4000mm & 5000mm

Heights:
2200mm (lower eaves)
height at rear varies depending on width

Colours/Finishes:

	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the
actual colour.

Product Information

With a high-quality modular construction, our Newcastle Monopitch canopy veers away from the one-size-fits-all approach and offers a made-to-measure solution without the custom-built price tag.

Features

- Multi-wall polycarbonate roof sheeting
- Robust tough construction featuring load bearing purlins
- Pitch can be towards or away from existing building
- Range of standard sizes available. Bespoke versions available on request
- Welded end frames and purlin section made from heavy-duty box
- Hot dipped galvanised to BS EN ISO 1461:2022

Materials Used

- Framework - Mild steel
- Cladding - 16mm structured multi-wall polycarbonate
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

Finish Options

- Galvanised to BS EN ISO 1461:2022
- Galvanised to BS EN ISO 1461:2022 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

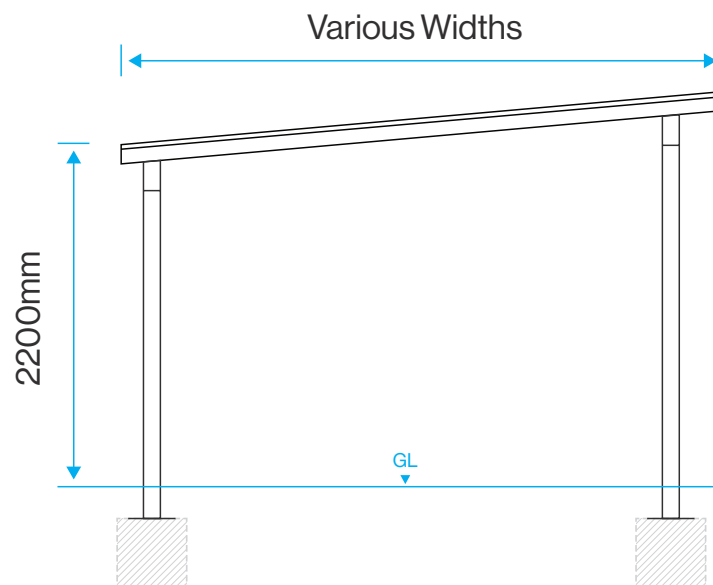
- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 12 months' warranty* on parts & labour

**Maintenance and other qualifying criteria apply*


Options

- Modular extension to any length
- Polyester powder coating
- Metal profile cladding
- Rainwater management
- Protective post pads
- Side panels
- Internal lighting (mains LED & solar)
- Roller shutters or PVC roller blinds
- Turnkey solutions (surveys, foundations & installation)

Diagram



Installation













Standard Unit Dimensions:

Lengths:
3000mm, 4000mm & 5000mm

Widths:
2000mm, 2500mm, 3000mm,
3500mm, 4000mm & 5000mm

Heights:
2200mm (lower eaves)
height at rear varies depending on width

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.