


Easi-Riser 2-Tier Cycle Rack (Lift Assisted) with Lower Trough Racks **BXMW/EASI-RISER-TRO**

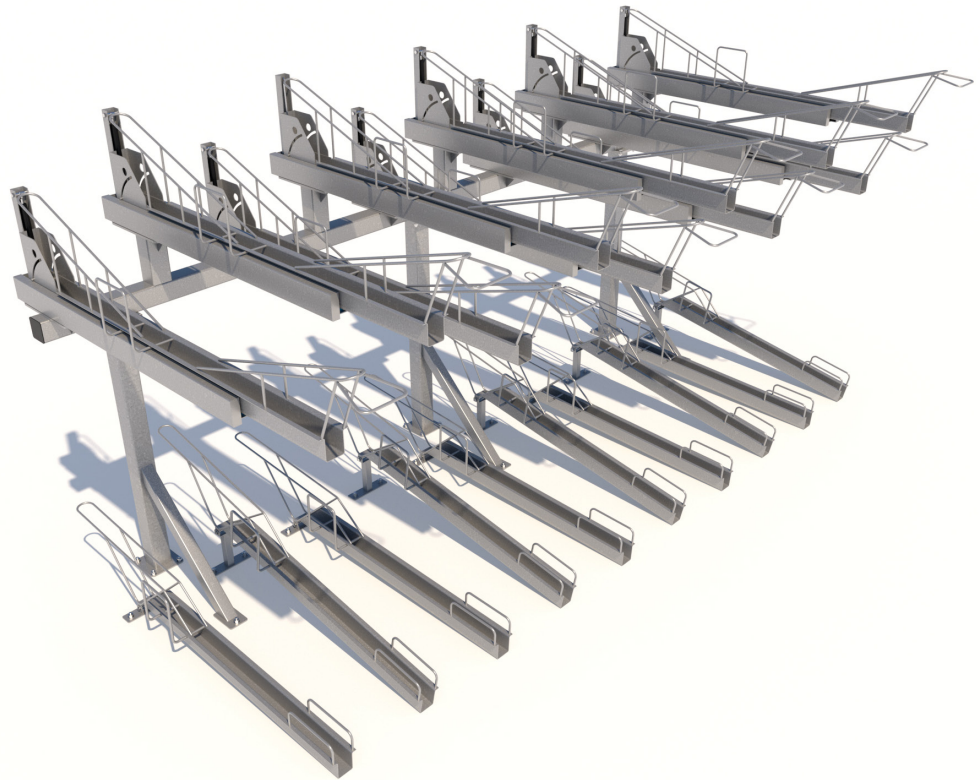

Minimum Area Requirements:

Height: 2455mm

Length with Capacities:

950mm (6 Cycles)
1325mm (8 Cycles)
1700mm (10 Cycles)
2075mm (12 Cycles)
2450mm (14 Cycles)
2825mm (16 Cycles)
3200mm (18 Cycles)
3575mm (20 Cycles)

Operating Space:

3679mm

Finish:



Galvanised Only Finish

Product Information

This two-tier cycle rack is a cost effective option for space-saving cycle storage. Not only this, but the Easi-Riser includes a gas strut mechanism as standard - this makes operation of the upper level troughs exceptionally easy and all the more accessible.

As most push bikes are around 15kgs they are reasonably easy to lift in the upper tier, even on non-lift assisted (manual) 2-tier cycle racks. With e-bikes being between 20 and 30 kg, our "Easi-Riser" gas strut lift-assisted 2-tier bike rack is the recommended choice (charging points not included as standard).

Features

- Staggered troughs allow for varying cycle hand bars to avoid clashing and enable easy operation.
- Gas strut lift assist mechanism for easy loading/unloading on upper tier.
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.
- Finish: framework, lower rack and upper trough/runners are galvanized only

Materials Used

- Framework - Mild Steel

Finish Options

- Galvanised to BS EN 1461

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Easi-Riser 2-Tier Cycle Rack (Lift Assisted) with Lower Trough Racks BXMW/EASI-RISER-TRO



Warranties


- 12 months' warranty* on parts & labour (excluding general wear & tear)

*Maintenance and other qualifying criteria apply

Options

- Sizes options based on cycle capacity
- Available with lower tier Sheffield Cycle Racks
- Alternative economy option: Eco-2-Tier Cycle Rack (Manual Lift)

Diagram

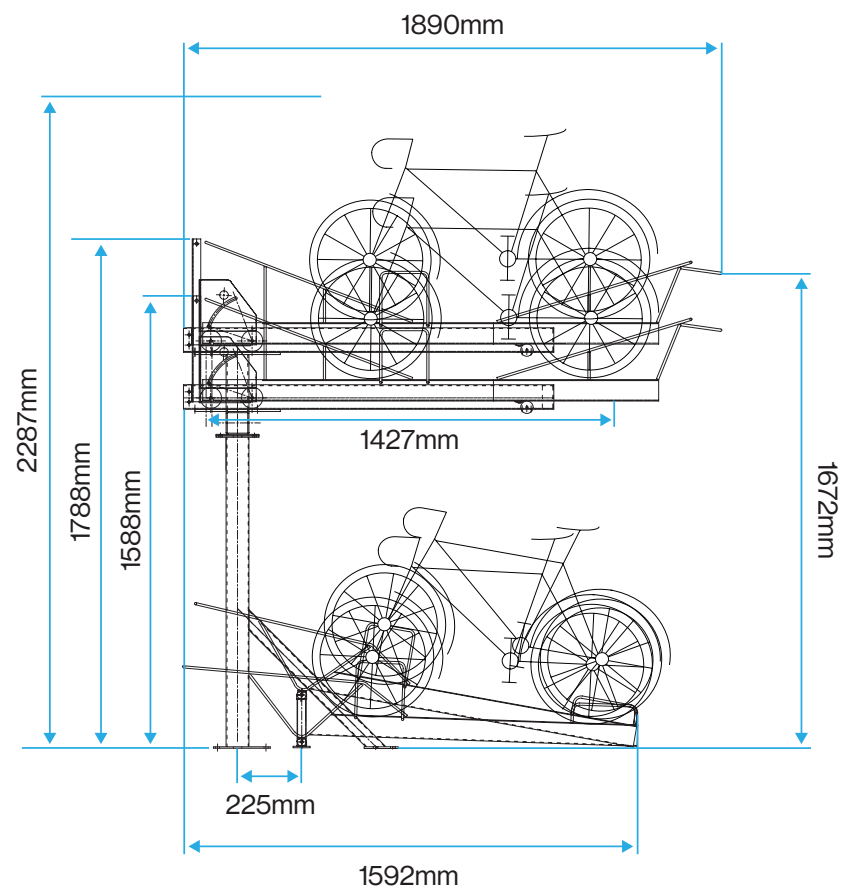

Minimum Area Requirements:

Height: 2455mm

Length with Capacities:

950mm (6 Cycles)
1325mm (8 Cycles)
1700mm (10 Cycles)
2075mm (12 Cycles)
2450mm (14 Cycles)
2825mm (16 Cycles)
3200mm (18 Cycles)
3575mm (20 Cycles)

Operating Space:

3679mm

Finish:



Galvanised Only Finish

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED
FIM 20278

ISO 14001
Environmental
Management
CERTIFIED
EMS 45526

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED
OHS 547079

