

## Anti-Vandal Wardale Cycle Shelter BXMW/AV-WAR-SHELTER

**broxap**<sup>®</sup>  
cycle parking & storage



### Standard Unit Dimensions:

Length: 4100mm  
Width: 2140mm  
Height: 2150mm

### Length with Capacities:

4100mm (10 Cycles)  
5000mm (12 Cycles)

*Other sizes available POA*

### Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Anti-Vandal Wardale<sup>®</sup> cycle shelter is a robust version of our popular and best-selling Wardale. With its modular design the Anti-Vandal Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Anti-Vandal Wardale cycle shelter includes a sliding gate and mechanical code locks for extra security.

## Features

- Trapezoidal Metal Profile roof cladding
- 5mm PETg UV Side Panels complete with 5mm mesh
- Robust modular construction
- Adjustable baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009 and Powder Coated
- Mechanical Code Locks
- Space Saving Sliding Gate

## Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



## Anti-Vandal Wardale Cycle Shelter BXMW/AV-WAR-SHELTER



### Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to EN ISO 11925-2

### Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply

### Options

- 5mm PETg UV Roof Panels complete with 5mm mesh
- 6mm polycarbonate for roof and sides complete with 5mm mesh
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- LED or solar lighting
- Full Installation Service

#### Standard Unit Dimensions:












Length: 4100mm  
Width: 2140mm  
Height: 2150mm

#### Length with Capacities:

4100mm (10 Cycles)  
5000mm (12 Cycles)


Other sizes available POA

#### Colours/Finishes:


		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

### Diagram

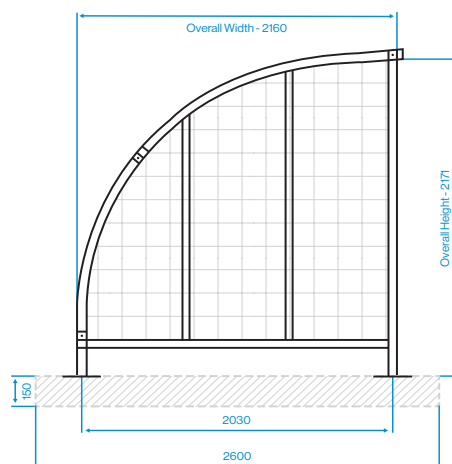

### Installation

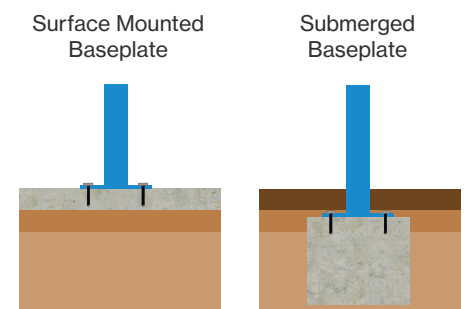

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

