















### Standard Unit Dimensions:

Length: 4100mm  
Width: 2140mm  
Height: 2150mm

### Length with Capacities:

3600mm (8 Cycles)  
4100mm (10 Cycles)  
5000mm (12 Cycles)

### Colours/Finishes:

|   |   |   |
|---|---|---|
|  |  |  |
| Galvanised Only   | White Aluminium   | Anthracite Grey   |
|  |  |  |
| BS 4800 10 A 07<br>Nimbus Grey  | Traffic Red   | Jet Black   |
|  |  |  |
| BS 4800 14 C 39<br>Holly Green  | Traffic Yellow  | Goose Grey  |
|  |  |  |
| Mid Blue  | Dark Blue   | Traffic White   |

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

## Product Information

The Littleborough Cycle Shelter uses the basis of the Wardale design whilst utilising curved front end frames which offered a reduced footprint, ideal for areas where space is minimal, with modular units the Littleborough Cycle Shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.


## Features

- Polycarbonate End Panels Included.
- Robust modular construction featuring load bearing purlins.
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts.
- Anti-climb end frames.
- Adjustable base plates.
- Hot dipped galvanized to BS EN ISO 1461:2009
- 4mm ClearView PETg UV roof and side cladding (5mm also available)
- Breeam Compliant Configurations

## Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



## Littleborough Cycle Shelter BXMW/LIT

### Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

### Weather Resistance

Cladding is UV Stabilised  
Wind resistant to 23m/s

### Fire Resistance

Cladding is fire tested to EN ISO 11925-2

### Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee\*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees\* on cladding material(s)
- 10 years' warranty\* on material (only)
- 12 months' warranty\* on parts & labour

\*Maintenance and other qualifying criteria apply


### Options

- HPS Colourcoat Steel Profile Cladding
- Opal Cladding to Roof and Sides
- Extended Adjustable Baseplates for Submerged Fixing
- Helmet Lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

### Diagram

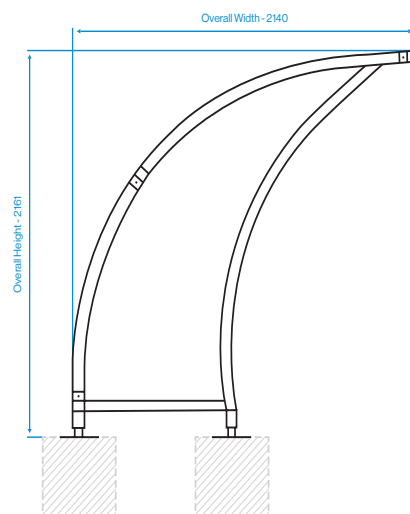

### Installation

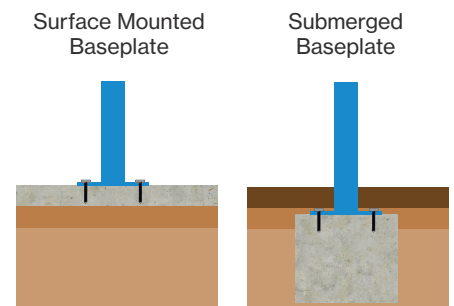

#### Standard Unit Dimensions:

Length: 4100mm  
Width: 2140mm  
Height: 2150mm

#### Length with Capacities:

3600mm (8 Cycles)  
4100mm (10 Cycles)  
5000mm (12 Cycles)

#### Colours/Finishes:

|                                |                 |                 |
|--------------------------------|-----------------|-----------------|
|                                |                 |                 |
| Galvanised Only                | White Aluminium | Anthracite Grey |
|                                |                 |                 |
| BS 4800 10 A 07<br>Nimbus Grey | Traffic Red     | Jet Black       |
|                                |                 |                 |
| BS 4800 14 C 39<br>Holly Green | Traffic Yellow  | Goose Grey      |
|                                |                 |                 |
| Mid Blue                       | Dark Blue       | Traffic White   |

The colours shown are a guide only.  
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

