



Standard Unit Dimensions:

Width: 2753mm
Height (Front): 2860mm
Height (Rear): 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Apollo shelter comprised tubular curved end frames and a curved roof to give a sleek minimalistic design. This shelter can work as a single unit but creates a fantastic spectacle when one or more units are positioned side by side or back to back. Modular in design, the Apollo can also be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.


Features

- Robust modular construction featuring tubular end frames
- Heavy-duty circular uprights and box section purlins and trimmers, assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Surface mounted baseplates
- Hot dipped galvanised to BS EN ISO 1461:2009
- 5mm ClearView PETg UV roof cladding
- Breeam Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Apollo Cycle Shelter BXMW/AP

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options

- HPS Colourcoat steel profile cladding
- Opal Roof Cladding
- Submerged Baseplates
- Powder coating to a wide range of colours
- LED or solar lighting
- Full Installation Service

Diagram

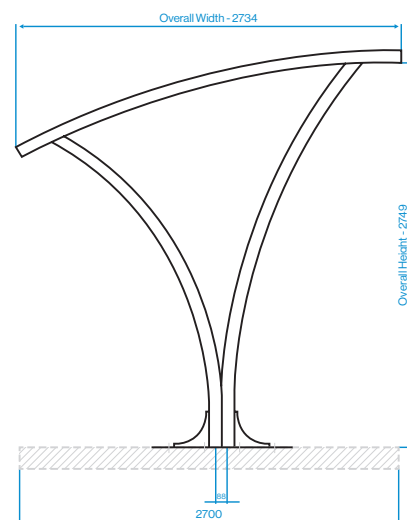

Installation

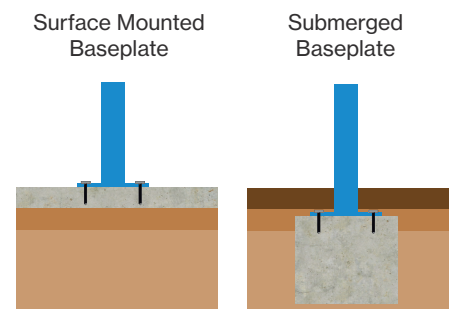

Standard Unit Dimensions:

Width: 2753mm
Height (Front): 2860mm
Height (Rear): 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

