

Anti-Vandal Wardale Cycle Compound BXMW/AV-WAR-COMPOUND

broxap[®]
cycle parking & storage



Standard Unit Dimensions:











Width: 5280mm
Height: 2150mm

Length with Capacities:

4100mm (20 cycles)
5000mm (24 cycles)

Other sizes available POA

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Anti-Vandal Wardale[®] cycle shelter is a robust version of our popular and best-selling Wardale. With its modular design the Anti-Vandal Wardale cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles. The Anti-Vandal Wardale cycle shelter includes a sliding gate and mechanical code locks for extra security.

Features

- Trapezoidal Metal Profile roof cladding
- 5mm PETg UV Side Panels complete with 5mm mesh
- Robust modular construction
- Adjustable baseplates
- Hot dipped galvanized to BS EN ISO 1461:2009 and Powder Coated
- Mechanical Code Locks
- Space Saving Sliding Gate
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

Materials Used

- Framework - Mild steel
- Cladding - 5mm PETg UV Side Panels complete with 5mm mesh

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Anti-Vandal Wardale Cycle Compound BXMW/AV-WAR-COMPOUND

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- 5mm PETg UV Roof Panels complete with 5mm mesh
- 5mm polycarbonate for roof and sides complete with 5mm mesh
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Swinging Security Gates
- Further anti crawl bars can be fitted dependent on surface level
- Helmet Lockers
- LED or solar lighting
- Full Installation Service
- Varied Range of Cycle Racks
- Varied Range of Cycle Stands

Standard Unit Dimensions:

Width: 5280mm
Height: 2150mm

Length with Capacities:

4100mm (20 cycles)
5000mm (24 cycles)


Other sizes available POA

Colours/Finishes:


Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

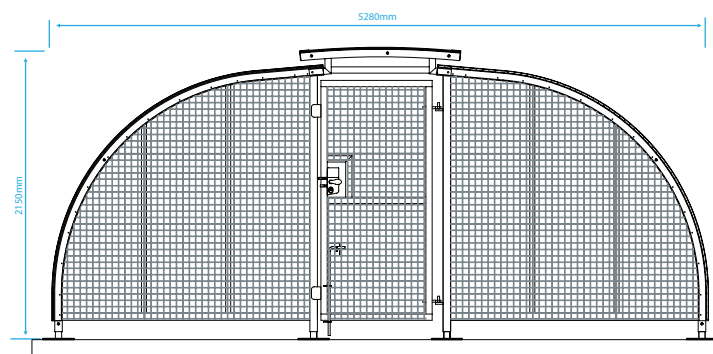

Installation

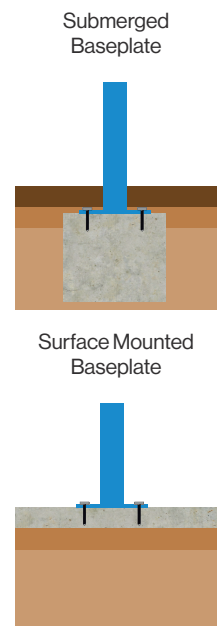

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

