

Cycle Shelters Specification Sheet

Orbital Cycle Shelter BXMW/ORB

broxap[®]
cycle parking & storage















Standard Unit Dimensions:

Width: 2975mm
Height: 2470mm

Length with Capacities:

3600mm (8 Cycles)

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

This circular shaped shelter is the ideal solution when looking for a contemporary style shelter that needs to be locked shut. The easy slide down door provides cycles with complete cover and also the option to securely lock the shelter to prevent unwanted damage.

Features

- Fixed, non-adjustable feet (*Due to the shelter having fixed, non-adjustable feet, a flat level base is required to install this shelter on to ensure correct operation of the door and the supporting gas-strut units.*)
- Robust modular construction
- Load bearing purlins
- Welded end frames
- Made from heavy-duty mild steel box section
- Assembled with anti-tamper high strength bolts
- Lockable lift assisted front door
- Hot dip galvanized to BS EN ISO 1461:2009

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N.E.W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information.

Orbital Cycle Shelter BXMW/ORB

Finish Options

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Power Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply


Options

- Multiple 'banks' to increase storage capacity
- Range of racks or stands
- Polyester powder coated steel side panels
- Open version without doors
- Full installation service

Diagram

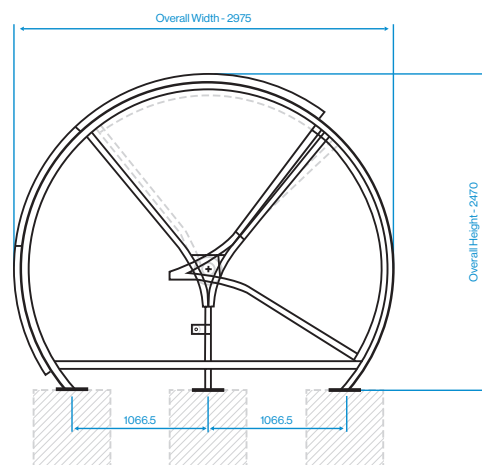

Installation



Standard Unit Dimensions:

Width: 2975mm
Height: 2470mm

Length with Capacities:

3600mm (8 Cycles)

Colours/Finishes:

	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

