

Height Restriction Barrier BX015522

broxap
bollards & barriers



Standard Unit Dimensions:

Upright bearing post
diameter: 101.6mm

Height: 2100mm under beam

Colours/Finishes:



Black & Yellow Banding

Product Information

Height restriction barrier available in various lengths with either fixed or split swinging cross bar.

Features

- Standard height of 2100mm
- Class 2 reflective banding for high visibility
- Barrier supplied in 3 sections for ease of transport
- Black and yellow banding
- Width specified by customer
- Manufactured to have the span you have

Materials Used

- Mild Steel

Options

- Continuous fixed or split swinging cross-bar
- Can be supplied with or without class 2 reflective banding
- Span can be altered for customer needs
- Height can be altered to meet customers specification


Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).


Height Restriction Barrier BX015522

Diagram

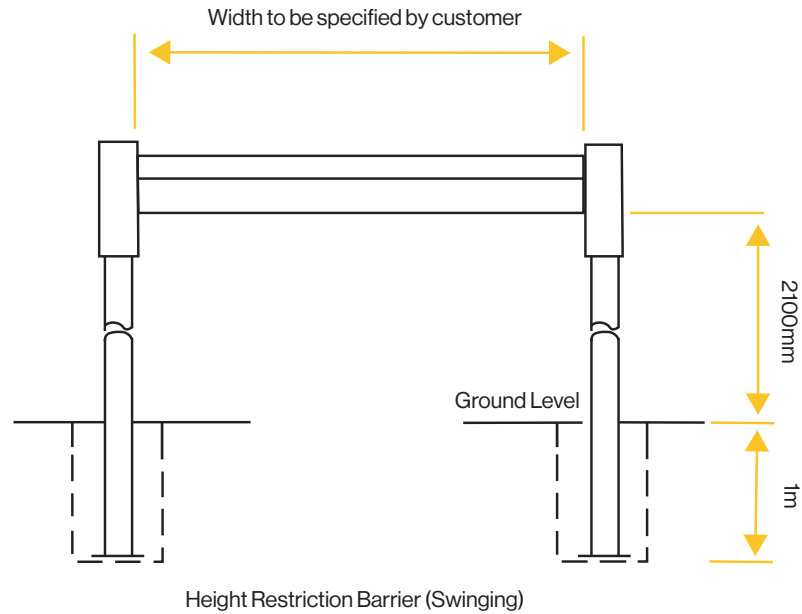

Installation

Root Fixed



Standard Unit Dimensions:

Upright bearing post
diameter: 101.6mm

Height: 2100mm under beam

Colours/Finishes:



Black & Yellow Banding

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

