


















Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:

3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:

		
Galvanised Only	White Aluminium	Anthracite Grey
		
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
		
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
		
RAL 5015 Mid Blue	Dark Blue	Traffic White
		
BS 4800 20 C 40 Midnight Blue	Dark Admiralty Grey	Moss Green

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

The Regal cycle shelter uses the basis of the Wardale design whilst utilising angled front end frames which add a modern look to the traditional design, with modular units the Regal cycle shelter can be linked together to create banks of shelters which allow to you accommodate almost any quantity of cycles.

Features

- Polycarbonate End Panels Included
- Robust modular construction featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Adjustable baseplates
- Hot dipped galvanized to BS EN ISO 1461:2022
- 4mm ClearView PEGg UV roof and side cladding (5mm also available)
- Bream Compliant Configurations

Materials Used

- Framework - Mild Steel
- Cladding - 4 mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Regal Cycle Shelter BXMW/RG

Finish Options

- Galvanised to BS EN ISO 1461:2022
- Galvanised to BS EN ISO 1461:2022 & Polyester Powder Coated

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to EN ISO 11925-2

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Steel profile, trapezoidal roof cladding
- Opal Cladding to Roof and Sides
- Extended adjustable baseplates for submerged fixing
- Helmet lockers
- Powder coated to a wide range of colours
- LED or solar lighting
- Full Installation Service
















Standard Unit Dimensions:

Length: 4100mm
Width: 2140mm
Height: 2150mm

Length with Capacities:


3600mm (8 Cycles)
4100mm (10 Cycles)
5000mm (12 Cycles)

Colours/Finishes:


		
		
		
		
		

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

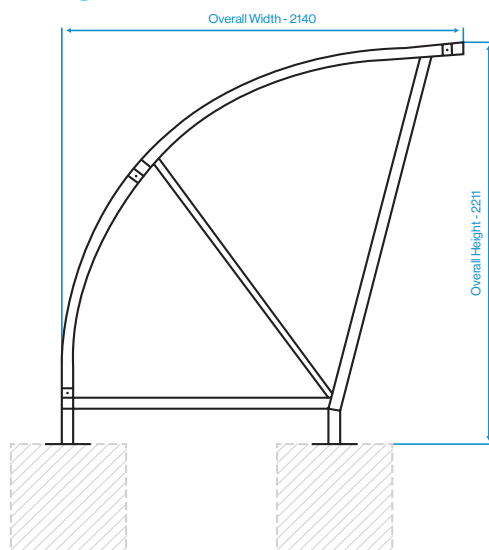

Installation

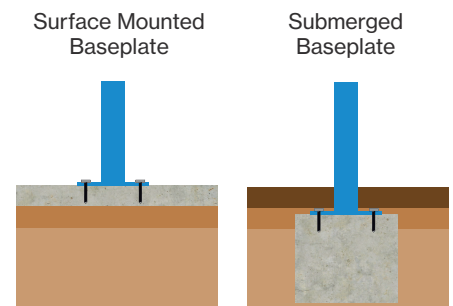

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

