Cycle Shelters Specification Sheet

Burntwood Cantilever Cycle Shelter

BXMW/BURNT/CAN

broxap
cycle parking & storage

Standard Unit Dimensions:

Overall Length: 3150mm/4150mm
Overall Width: 2200mm
Overall Height: 2380mm
Column Centres: 3000mm/4000mm
Overall Height: 2380mm
Head Clearance: 2230mm
Submerged Baseplate: 150mm

Length with Capacities:

3150mm (6 cycles)
4150mm (10 cycles)

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White
BS 4800 20 C 40 Midnight Blue	BS 4800 18 B 25 Dark Admiralty Grey	RAL 6005 Moss Green

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

A Contemporary modular Cycle Shelter, the Burntwood offers a stylish alternative to the PETg and Polycarbonate shelters. Integral Guttering offers built in rainwater management. While roof cladding constructed of pre-finished steel offers a robust design which also offers vandal resistant properties, while maintaining an appealing, eye catching finish.

Features

- Robust modular construction
- Welded end frames and pulin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-climb end frames
- Trapezoidal Roof Cladding
- Breeam Compliant Configurations

Materials

- Framework - Mild Steel
- Cladding - Steel Profile, Trapezoidal roof cladding
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanized steel flat

Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461:2022
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

bsi ISO 9001 Quality Management Systems CERTIFIED FM 20178 · ISO 14001 Environmental Management CERTIFIED EMS 45526 · ISO 45001 Occupational Health and Safety Management CERTIFIED OHS 547679
ROSPA Member
Constructionline Gold Member
CHAS
SafeContractor
Smas REGISTERED SSIP Core Criteria
rpii

All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).

Cycle Shelters Specification Sheet

Burntwood Cantilever Cycle Shelter
BXMW/BURNT/CAN

broxap cycle parking & storage

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

**Maintenance and other qualifying criteria apply*

Options

- Opal Cladding to Roof and Sides
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service
- Varied Range of Cycle Racks
- Varied Range of Cycle Stands

Standard Unit Dimensions:

Overall Length: 3150mm/4150mm
Overall Width: 2200mm
Overall Height: 2380mm
Column Centres: 3000mm/4000mm
Overall Height: 2380mm
Head Clearance: 2230mm
Submerged Baseplate: 150mm

Length with Capacities:

3150mm (6 cycles)
4150mm (10 cycles)

Colours/Finishes:

Galvanised Only	RAL 9006 White Aluminium	RAL 7016 Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	RAL 3020 Traffic Red	RAL 9005 Jet Black
BS 4800 14 C 39 Holly Green	RAL 1023 Traffic Yellow	BS 4800 00 A 05 Goose Grey
RAL 5015 Mid Blue	RAL 5013 Dark Blue	RAL 9016 Traffic White
BS 4800 20 C 40 Midnight Blue	BS 4800 18 B 25 Dark Admiralty Grey	RAL 6005 Moss Green

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Diagram

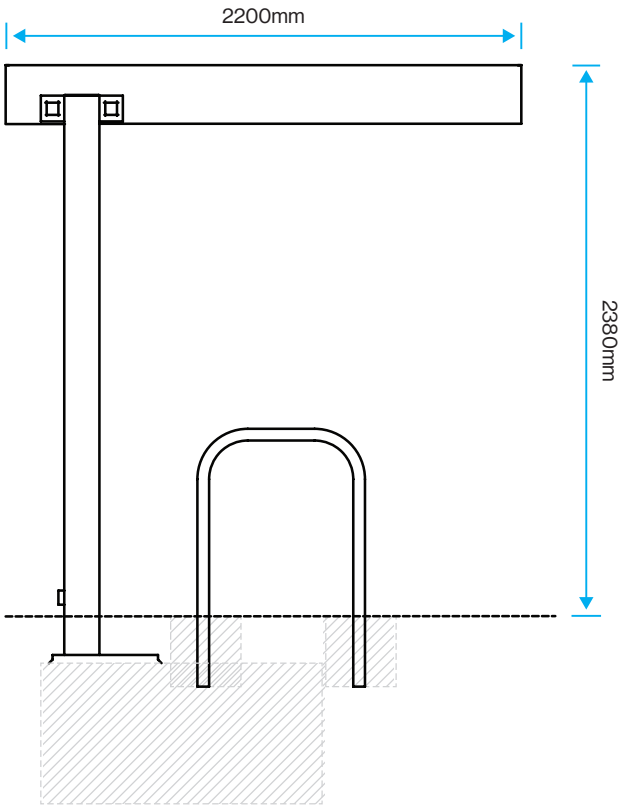

Installation

Submerged Baseplate



Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com

All dimensions are in millimeters, weights in kilograms and capacities in litres, are approximate and do not form any part of the contract. All prices are guide prices only and should be used for estimating purposes only. Broxap Limited reserve the right to change the design, specification or price of any item sold at any time. All prices exclude VAT and delivery. Please Note: All information on this data sheet is subject to orientation (N,S,E,W) altitude and proximity to buildings, but is sufficient for use as general/preliminary information).