

# Regal Cycle Shelter

BXMW/RG


**broxap**<sup>®</sup>  
street furniture



**The Regal Cycle Shelter utilises angled front end frames to add a modern look to the traditional design.**


## Features:

- Polycarbonate end panels included
- Robust Modular Construction Featuring load bearing purlins
- Welded end frames and purlin section made from heavy-duty box section assembled with anti-tamper high strength bolts
- Anti-Climb End Frames
- 4mm Clear View PETg UV Roof and side Cladding
- Hot dipped galvanized to BS EN ISO 1461:2022
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes
- BREEAM and Code for Sustainable Homes Compliant



☎ 01782 564411  
✉ [info@broxap.com](mailto:info@broxap.com)  
🌐 [www.broxap.com](http://www.broxap.com)

## Dimensions

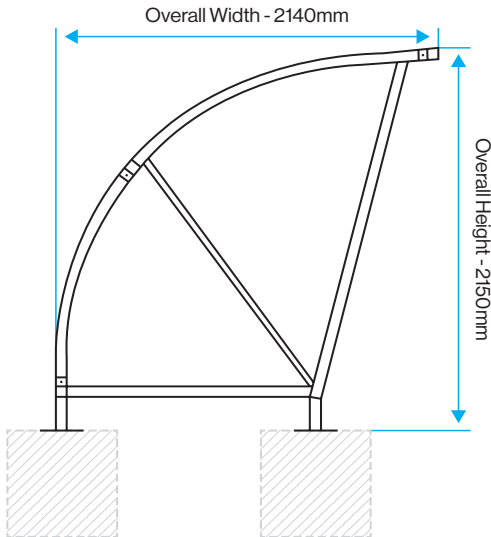

## Standard RAL/BS Colours

|                    |                    |          |
|--------------------|--------------------|----------|
| RAL 9005           | RAL 9016           | RAL 9006 |
| BS 4800<br>00 A 05 | BS 4800<br>10 A 07 | RAL 7016 |
| RAL 6005           | BS 4800<br>14 C 39 | RAL 5015 |
| RAL 5013           | BS 4800<br>20 C 40 | RAL 3020 |
|                    | RAL 1023           |          |

## Product Details

|                                 |                                                                                                                                                                                                                                           |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Name</b>             | Regal Cycle Shelter                                                                                                                                                                                                                       |
| <b>Product Code</b>             | BXMW/RG                                                                                                                                                                                                                                   |
| <b>Dimensions</b>               | 2140 x 2150 mm                                                                                                                                                                                                                            |
| <b>Lengths &amp; Capacities</b> | 3600mm (8 Cycles)<br>4100mm (10 Cycles)<br>5000mm (12 Cycles)<br>6000mm (14 Cycles)                                                                                                                                                       |
| <b>Framework</b>                | Galvanised steel                                                                                                                                                                                                                          |
| <b>Cladding</b>                 | 4mm Clear View PETg UV<br>5mm Clear View PETg UV<br>Trapezoidal Roof Cladding<br>Opal Roof Cladding                                                                                                                                       |
| <b>Weather Resistance</b>       | Cladding is UV stabilised<br>Wind resistant to 23m/s                                                                                                                                                                                      |
| <b>Fire Resistance</b>          | Cladding is fire tested to EN IOS 11925-2                                                                                                                                                                                                 |
| <b>Finish Options</b>           | Hot-Dip Galvanised to BS EN ISO 1461:2022<br>Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft<br>Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft                                      |
| <b>Additional Options</b>       | Polyester powder coated in any standard RAL/BS colour<br>LED or solar lighting<br>Helmet Lockers<br>Multiple banks to increase cycle capacity<br>Varied range of cycle racks<br>Varied range of cycle stands<br>Full Installation Service |
| <b>Fixing</b>                   | Surface mounted base plates<br>Submerged base plates<br>Extended adjustable base plates                                                                                                                                                   |