













Newcastle Junior Walkway BXMW/NEWJ-WALK



Standard Unit Dimensions:

Bespoke sizes to suit customer requirements

Framework Colours/Finishes:

 Galvanised Only	 RAL 9006 White Aluminium	 RAL 7016 Anthracite Grey
 BS 4800 10 A 07 Nimbus Grey	 RAL 3020 Traffic Red	 RAL 9005 Jet Black
 BS 4800 14 C 39 Holly Green	 RAL 1023 Traffic Yellow	 BS 4800 00 A 05 Goose Grey
 RAL 5015 Mid Blue	 RAL 5013 Dark Blue	 RAL 9016 Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

The Newcastle Junior is a versatile, cost effective walkway. Available in a Symmetric or Asymmetric design the Newcastle Junior is the ideal width to cover pathways.

Corners and bends can be easily accommodated using hip joints or individual canopies which overlap. The Newcastle Junior can also accommodate side panels to form a partially or a fully enclosed walkway.

Features

- 4mm ClearView PETg UV sheeting
- Base plate or submerged fixing
- Robust, tough construction
- Welded end frames and purlin section made from heavy duty box section
- Assembled with anti-tamper high strength bolts

Materials Used

- Framework - Mild steel
- Cladding - 16mm structured multi-wall polycarbonate
- Fasteners - Zinc plated
- Cover Strips - Aluminium capex

Finish Options (Framework)

- Galvanised to BS EN ISO 1461:2009
- Galvanised to BS EN ISO 1461:2009 & Polyester Powder Coated

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Side Panels in PETg or glazed finish
- Trapezoidal Roof Cladding
- Opal Cladding on the roof and side panels
- Powder Coating to a wide range of colours
- UPVC or Aluminium Guttering
- LED lighting or solar lighting
- Full installation service

Standard Unit Dimensions:

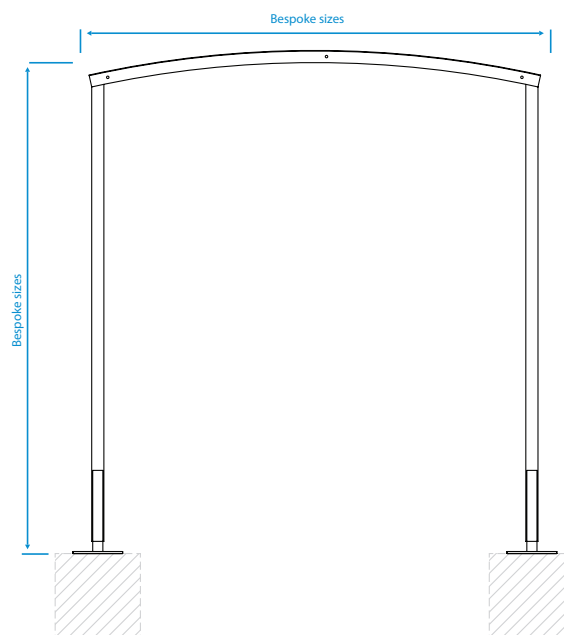
Bespoke sizes to suit customer requirements

Framework Colours/Finishes:

Galvanised Only	White Aluminium	Anthracite Grey
BS 4800 10 A 07 Nimbus Grey	Traffic Red	Jet Black
BS 4800 14 C 39 Holly Green	Traffic Yellow	Goose Grey
Mid Blue	Dark Blue	Traffic White

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Diagram



Installation

